

Code: IPC-CD2C40M-ZS-2812

IP VANDALPROOF CAMERA **IPC-CD2C40M-ZS-2812** - 3.7 Mpx 2.8 ... 12 mm - MOTOZOOM DAHUA

Net: **239.67 EUR** Gross: **239.67 EUR**

IP camera with efficient H.264 / H.265 image compression algorithm for clear and smooth video streaming at maximal resolution of 3.7 Mpx. The used motozoom lens with 2.8 ... 12 mm focal length allows to remote view angle adjustment. PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install.

Camera is according to IP67 Index of Protection norm. The DAHUA Cooper series product has been designed to minimize costs while maintaining high quality and ease of use.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/3 " Progressive Scan CMOS
Matrix size:	4 Mpx
Resolution:	2560 x 1440 - 3.7 Mpx , 2304 x 1296 - 3 Mpx , 1920 x 1080 - 1080p , 1280 x 960 - 1.3 Mpx , 1280 x 720 - 720p
Lens:	2.8 ... 12 mm - Motozoom
View angle:	• 94 ° ... 33 ° (manufacturer data) • 87 ° ... 29 ° (our tests result)
Compression:	H.265+ / H.265 / H.264+ / H.264 / MJPEG
S/N ratio:	> 50 dB
Range of IR illumination:	30 m
Alarm inputs / outputs:	—
Bitrate:	• 6 kbps ... 6144 kbps - H.265 • 16 kbps ... 6144 kbps - H.264
Main stream frame rate:	20 fps - 3.7 Mpx 25 fps - 3 Mpx
Network interface:	10/100 Base-T (RJ-45)

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Network protocols:	HTTP, HTTPS, TCP, ARP, RTSP, RTP, RTCP, UDP, SMTP, FTP, DHCP, DNS, DDNS, PPPoE, IPv4/IPv6, QoS, UPnP, NTP, Bonjour, IEEE 802.1x, Multicast, ICMP, IGMP, TLS, SSH, Multicast
Audio:	—
WEB Server:	Built-in, NVR compliance
Memory card slot:	Micro SD memory cards up to 128GB support (possible local recording)
Max. number of on-line users:	20
ONVIF:	16.12
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) <ul style="list-style-type: none"> • Android: Free application DMSS • iOS (iPhone): Free application DMSS
Default admin user / password:	admin / - The administrator password should be set at the first start
Default IP address:	192.168.1.108
Web browser access ports:	80, 37777
PC client access ports:	37777
Mobile client access ports:	37777
Port ONVIF:	80
RTSP URL:	rtsp://admin:hasło@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:hasło@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream
RS-485 interface:	—
Main features:	<ul style="list-style-type: none"> • Motozoom lens • D-WDR - Wide Dynamic Range • 3D-DNR - Digital Noise Reduction • ROI - improve the quality of selected parts of image • BLC - Back Light Compensation • HLC - High Light Compensation (spot) • ICR - Movable InfraRed filter • AGC - Automatic Gain Control • Auto White Balance • Mirror - Mirror image • Motion Detection - max. 4 zones • Privacy zones - max. 4
Power supply:	<ul style="list-style-type: none"> • PoE (802.3af), • 12 V DC / 470 mA
Power consumption:	<ul style="list-style-type: none"> ≤ 5.6 W @ 12 V DC ≤ 6.5 W @ PoE
Housing:	Dome, Metal
Color:	White
"Index of Protection":	IP67
Vandal-proof:	IK10
Operation temp:	-30 °C ... 60 °C
Supported languages:	Polish, English, Czech
Weight:	0.46 kg
Dimensions:	Ø 122 x 89 mm
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Camera view after remove the Dome cover:



Memory card slot:




Mounting side view:



See how to initialize DAHUA cameras:

:
In the kit:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

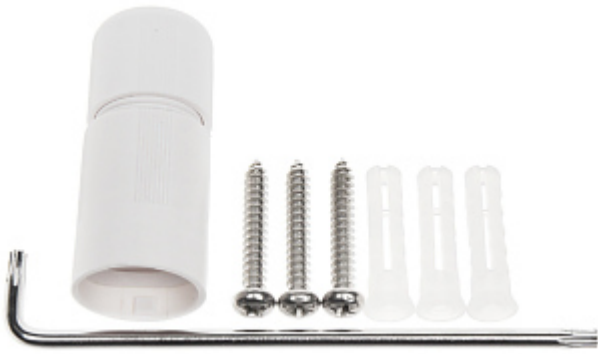

OUR TESTS


Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

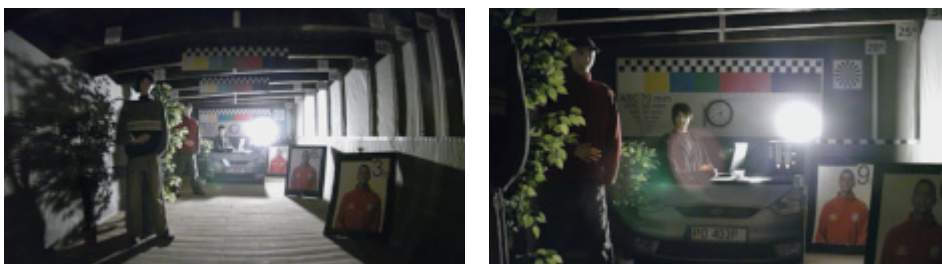

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------