


Code: HN-C50/3

# CIRCUIT BREAKER **HN-C50/3** THREE-PHASE 50 A C TYPE EATON

Net: **30.04 EUR** Gross: **30.04 EUR**

Thermal-magnetic circuit breaker with C-type curve and 50A rated current. The HN-C50/3 circuit breaker is compatible to DIN TS-35 rail mounting system.

Circuit breakers with C-type breaking curve are designed to protection against short-circuits and overloads of the installation, where are used the devices with high inrush currents (motors, transformers).

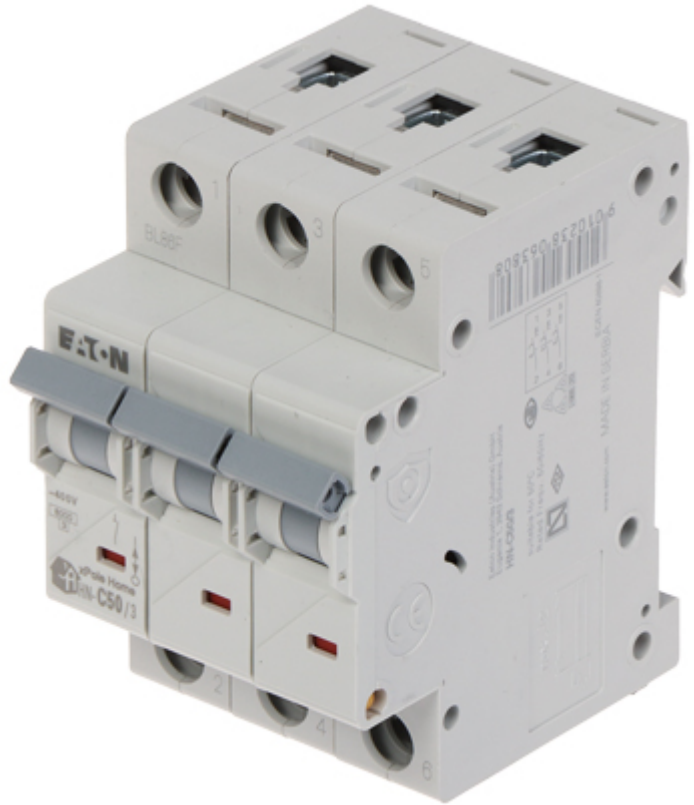

## SPECIFICATION

Device type:	Circuit Breaker, Three-phase
Rated current:	50 A
Number of poles:	3
Tripping curves:	C type
Breaking capacity:	6000 A
Rated voltage:	<ul style="list-style-type: none"><li>• 230 V AC / 50 Hz</li><li>• 400 V AC / 50 Hz</li></ul>
Connectors type:	screw terminals
Wire gauge:	1 mm <sup>2</sup> - 25 mm <sup>2</sup>
Main features:	<ul style="list-style-type: none"><li>• Contact position indicator</li><li>• Possibility of sealing</li></ul>
Housing:	Plastic, DIN, TS-35 rail mounting
Width in 17.5 mm modules:	3
Weight:	0.370 kg
Dimensions:	52.5 x 84.5 x 73 mm
Manufacturer / Brand:	EATON
Guarantee:	2 years

## PRESENTATION



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60


Front view:



Mounting side view:



Tripping curves:

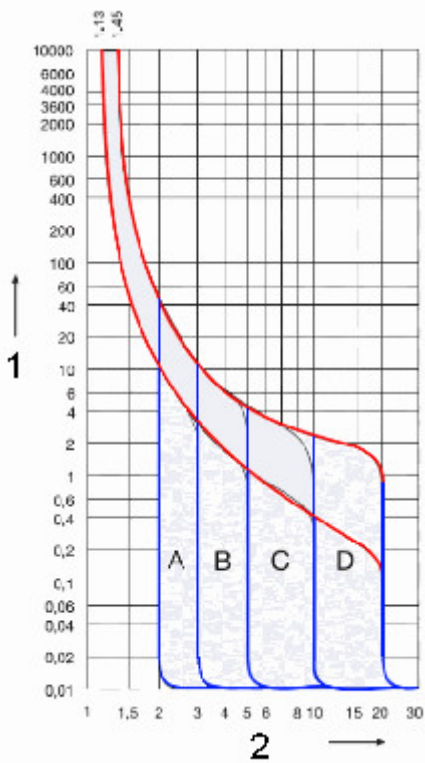

1. Tripping time (s)
2. The multiplier of the rated current

#### PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
 POL; 60-713 Poznań; Graniczna 10  
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60