

Code: CS-NT24-PRO

CABLES TESTER CS-NT24-PRO

Net: 841.60 PLN Gross: 841.60 PLN

The CS-NT24-PRO tester is used to measure cable continuity, check the type of UTP and detect the condition of the telephone line. The device allows you to perform measurements on telephone lines, twisted-pair cables and coaxial cables. An additional function is the ability to search for a specific wire from among more tangled cables or in a large bundle of wires.

The tester has a built-in TDR reflectometer, allows you to test the length and attenuation of the cable and find a break or short-circuit point. HD Coaxial video level meter, can detect TVI/CVI/AHD/CVBS signal peak value. PING test, checks whether the Ethernet port of the IP camera or other network equipment is working properly and whether the IP address is free. The device finds the IP address of the camera or other connected network equipment.

Large, readable LCD display.

The device uses a built-in Li-Ion battery, which guarantees operation up to 16 hours on a single charge.



SPECIFICATION

Tested cables:	STP / UTP cat. 5, 5e, 6, 6e - RJ45 (8P8C), RJ11 (6P4C), Coaxial cable
Power supply:	Cables tester : Li-Ion battery 3.7 V / 2000 mAh, USB DC 5V/2A power adapter (included) Probe : 2 x 1.5V, type AA/LR6/FR6 battery (not included)
Typical battery charge time:	3 h
Backup time:	16 h
Main features:	<ul style="list-style-type: none">• 2.4 " LCD display - 320 x 240 px• Cable test and cable tracer : cable type, UTP cable's sequence and type test, the fault of RJ45 connector• Test TDR - RJ45 : pair status, length, attenuation, reflectivity, impedance, skew - Length of the cable max. 180 m• Test TDR 2.0 : Searching for a wire fault point - Length of the cable max. 1200 m,• Detection of the connected port in switch• Test PING : correct operation of the IP camera's Ethernet port, correct IP address• IP Scan• Identification of the network port and duplex mode• Identification the wire in the group of wires• Telephone line condition detection• Detecting and locating a cable break or short circuit• HD coaxial video level meter• Automatic power-off : 10 ... 120 minutes
Weight:	0.34 kg - Cables tester 0.11 kg - Probe
Dimensions:	175 x 88 x 40 mm - Cables tester 220 x 47 x 32 mm - Probe
Guarantee:	2 years

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

PRESENTATION

Front panel:



Connectors:





Rear view:



On the rear side there is a place for batteries:



Probe:










Connector:








Place for batteries 2 x 1.5V AA:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

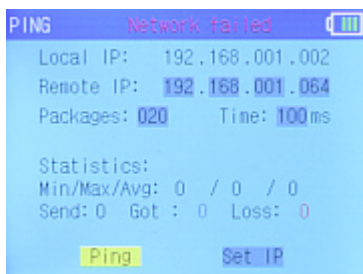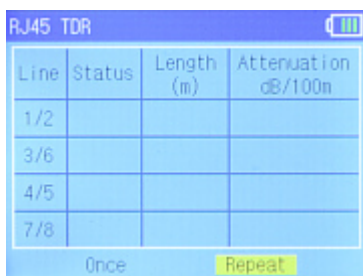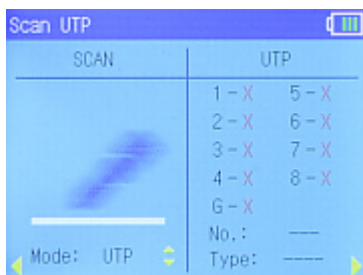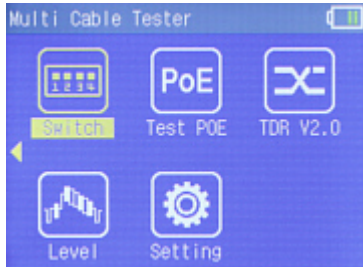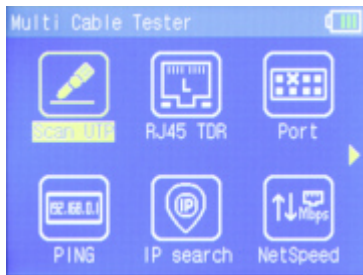

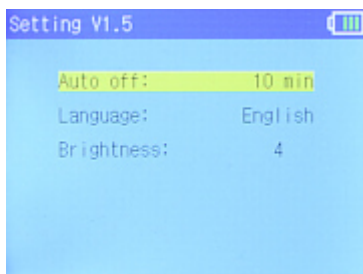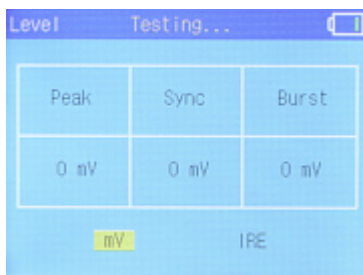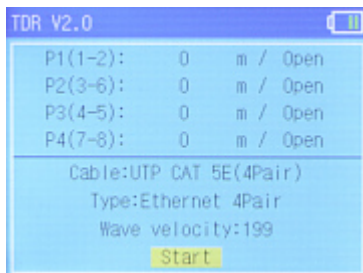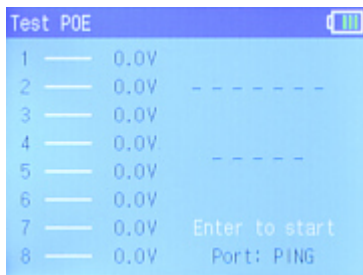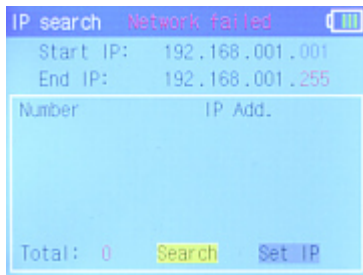

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60