

Code: KIT/NVR1104HS-W-S2/4-F22FE

SURVEILLANCE KIT **KIT/NVR1104HS-W-S2/4-F22FE** Wi-Fi, 4 CHANNELS

HDD 1TB - 1080p 2.8 mm IMOUI

Net: **284.98 EUR** Gross: **284.98 EUR**

The surveillance kit includes 4 cameras, Wi-Fi IMOUI DVR with 1TB hard disk, and 4 power adapters DC 12V/1A for independent camera power supply.

Network Video Recorder allowing to operate with Wi-Fi IMOUI cameras supported 802.11 b/g/n standards. The menu options layout has been designed for all users, even beginners can easy navigate and change parameters in DVR settings without any problem.

The used Wi-Fi module allows to remote communication with camera for max. distance up to 50 m. The cameras of the IMOUI series have been designed with special care to simplify the configuration and operation.



SPECIFICATION

Standard:	IP
Supported resolutions:	1080p - 1920 x 1080 px
Video outputs:	1 pcs HDMI 1 pcs VGA
Audio support:	4 Channels - Audio from cameras
Audio inputs:	1 pcs CINCH
Audio outputs:	1 pcs CINCH
Image compression method:	Smart H.265+ / H.265 / Smart H.264+ / H.264
Bitrate:	max. 40 Mbps max. 16 Mbps Wi-Fi
Supported hard drives:	• 1 x 8 TB SATA, • HDD : 1 TB (included)
Recording modes:	Manual, Motion Detection, Schedule
External storage devices backup:	Backup to USB drive (pendrive, external drive)
Searching and playback the records:	Records searching: by time and events type. Records playback: forward, backward, fast, slow Advanced searching (to the one second accuracy) 1/4 channel synchronous playback
Interface:	• 1 x RJ-45 10/100 Base-TX • 2.4 GHz Wi-Fi - IEEE 802.11 b/g/n
Network functions:	• Built-in Wi-Fi module - Imou cameras support : Smart, auto-pairing, Remote configuration, Remote management • Full support via network, Remote records copying, Web-Server built-in
ONVIF:	✓

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Default IP address:	192.168.1.108
Default admin user / password:	admin / - The administrator password should be set at the first start
Web browser access ports:	80, 37777
PC client access ports:	37777
Mobile client access ports:	37777
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) • Android: Free application IMOU • iOS (iPhone): Free application IMOU
RTSP URL:	rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream
USB:	2 pcs USB 2.0
Serial ports:	—
Alarm inputs / outputs:	—
PTZ control:	—
Motion Detection:	✓
Intelligent image analysis:	—
Main features:	• Smart, auto-parking < 120 s • Alarm notifications • 2x2 MIMO - MIMO technology - increases the throughput of wireless link (multiple antennas transmission) • Operating range in open area : 100 m
Mouse support:	✓
IR remote controller in the set:	—
Power supply:	12 V DC / 1.5 A (power adapter included)
Power consumption:	≤ 10 W (without HDD)
Operation temp:	-10 °C ... 45 °C
Weight:	1.3 kg (Recorder with HDD)
Dimensions:	260 x 248 x 48 mm
Supported languages:	Polish, English

CAMERA:

Standard:	IP
Resolution:	1920 x 1080 - 1080p
Sensor:	1/2.8 " Progressive Scan CMOS
Lens:	2.8 mm
View angle:	108 °
White light LED illuminator range:	30 m
Audio:	• Microphone built-in, • Speaker built-in, • Alarm siren 110 dB • Audio transmission via network
Image compression method:	H.265 / H.264
Main stream frame rate:	25 fps @ 1080p
Network protocols:	TCP, DHCP



ONVIF:	✓
Interface:	- Ethernet : 100 Mbps - Wi-Fi IEEE 802.11 b/g/n - 2.4 GHz
WEB Server:	—
Mobile phones support:	Access by a cloud (P2P) - Android: Free application IMOU - iOS (iPhone): Free application IMOU
Default admin user / password:	admin / - The administrator password should be set at the first start
Default IP address:	DHCP
Web browser access ports:	—
PC client access ports:	—
Mobile client access ports:	—
Port ONVIF:	—
RTSP URL:	—
Memory card slot:	Micro SD memory cards up to 256GB support (possible local recording)
Main features:	- Wi-Fi module - IEEE 802.11 b/g/n, - MIMO technology - increases the throughput of wireless link (multiple antennas transmission) - Motion Detection - People detection - D-ZOOM - Digital Zoom : 16x - Built-in alarm siren - LED Floodlight - Full Color - colorful night mode - Light and sound alarm - RESET button
Power supply:	12 V DC / 1 A (power adapter included)
Power consumption:	< 5.32 W
"Index of Protection":	IP67
Weight:	0.36 kg
Dimensions:	148 x 74 x 74 mm
General information:	
Manufacturer / Brand:	IMOU
Guarantee:	2 years

PRESENTATION

CAMERA:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Side view:




Bottom view:



Memory card slot and "Reset" button:



Mounting side view:

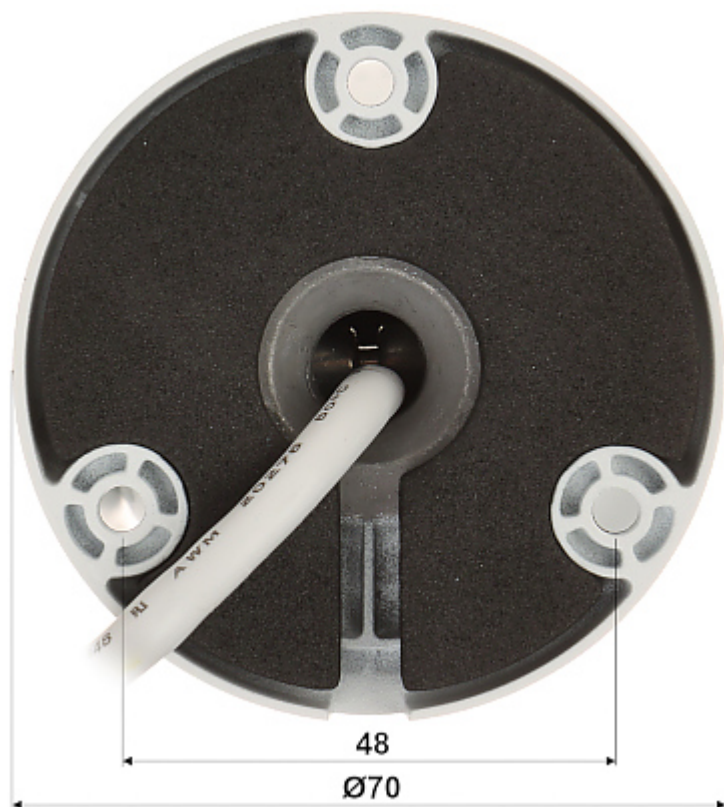

DVR:



Connectors:



In the kit:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

