

Code: ULT-FC.E-2SM

FIBER OPTIC CABLE **ULT-FC.E-2SM**

Net: **0.76 PLN** Gross: **0.76 PLN**

The ULT-FC.E-2SM is an universal fiber optic cable for indoor and outdoor applications.

The cable contains single-mode fibers in the G.657A2 standard with a diameter of 250 µm. The fibers are made in accordance with EN 50267-2-2, EN50268-2 and ISO 4892/2 standards.




SPECIFICATION

Fiber type:	Single-mode, G.657A2, 9/125 µm, CORNING
Number of fibers:	2 pcs
Cable diameter:	3 mm
Cable weight:	8.5 kg / 1000 m
Fiber insertion loss:	< 0.36 dB/km for 1310 nm < 0.22 dB/km for 1550 nm
Buffer diameter:	250 µm
Crush resistance:	500 N / 100 mm
Minimal bend radius:	• 20 x outer diameter (during installation) • 10 x outer diameter (after installation)
Main features:	• Very convenient to install • the LSZH (or LSOH) jacket - zero halogen, flame retardant and low smoke • Due to the reinforcement of aramid fibers, the cable has a high resistance to tension: 800 N • Water resistance - 3m water column for 24h • Class CPR: Eca
Application:	• due to the small size and flexibility, the cables are ideal for installation in cable ducts • it is used in modern FTTH and FTTB systems, in server rooms, between buildings installations • universal fiber optic cables intended for horizontal connections in buildings and outside buildings in secondary sewage system
Operation temp:	-40 °C ... 60 °C
Installation temperature:	-10 °C ... 60 °C
Supported norms:	• EN 50267-2-2 • EN 50268-2 • ISO 4892/2
Guarantee:	2 years

PRESENTATION

Cross-section of a cable:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

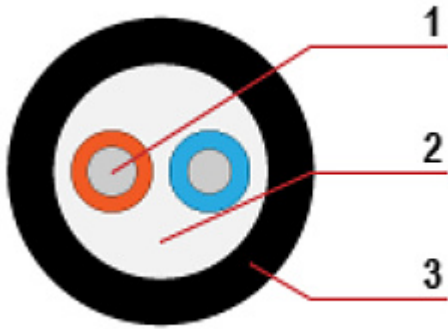

1. Single-mode fibers G.657A
2. Aramid yarn
3. LS0H UV-resistant outer shell

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

