

Code: PRT62MF-G

PROXIMITY READER **PRT62MF-G** ROGER

Net: **111.87 CAD** Gross: **111.87 CAD**



Outdoor proximity cards and key-fobs reader. 13.56 MHz S50 standard.

SPECIFICATION

Cards support:	13.56 MHz S50
Reading distance of prox-keys:	max. 6 cm
Keyboard built-in:	—
Autonomous operation:	✓
Doorbell button:	—
Tamper output:	✓
Communication:	• Wiegand 26-66bit • Magstripe (Clock & Data) • RACS (Roger)
Main features:	• Tamper protection (detection of removing from mounting surface and enclosure opening) • LED indication • Beep signal • Can be used for 13.56 MHz S50 card programming (free of charge RARC software is required) • 120 indexed users • History of 1024 events • Two transistor outputs • Two inputs NO/NC • Manual or computer programming
Power supply:	12 V DC
Average current consumption:	65 mA
Operation temp:	-25 °C ... 60 °C
Permissible relative humidity:	10 ... 95 % (non-condensing)

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

"Index of Protection":	IP67
Weight:	0.11 kg
Dimensions:	100 x 40 x 25 mm
Manufacturer / Brand:	ROGER
Guarantee:	3 years

PRESENTATION


Front panel:




Mounting side view:



Dimensions:

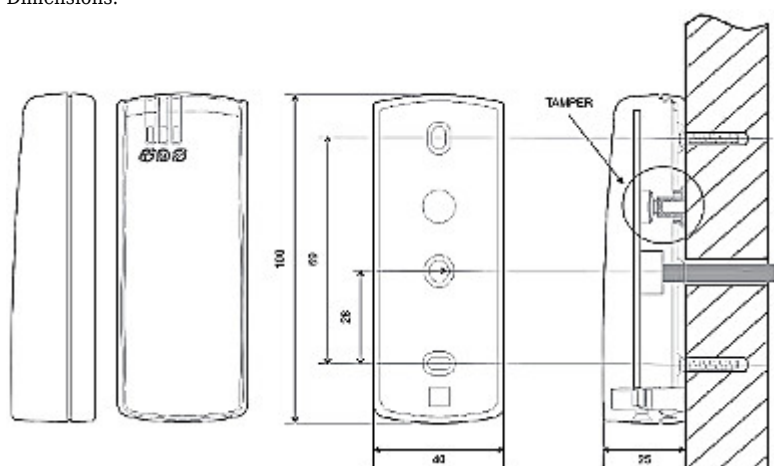

In the kit:

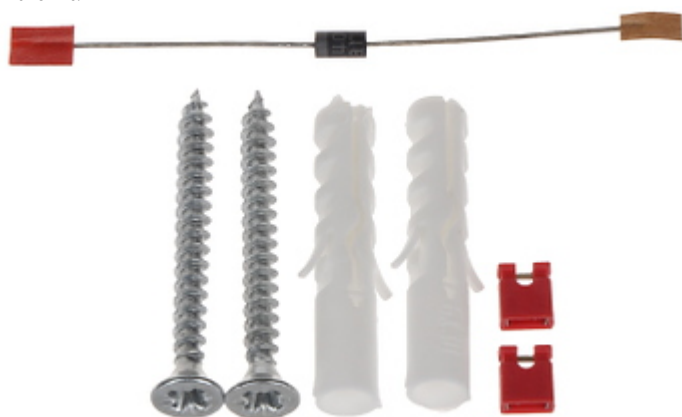

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------