

Code: VD65-2812/2

PAL VANDALPROOF CAMERA **VD65-2812/2** 650 TVL 2.8 ... 12 mm

Net: **160.00 PLN** Gross: **160.00 PLN**

Vandal-proof camera in metal housing with high resolution Sony Super HAD II sensor and wide range of view angle adjustment. It is equipped with IR illuminator, which is turned on by twilight sensor when illumination conditions are low.

Camera Dome cover is protected by metal cable against falling during installation works. It is equipped with OSD menu controller, which allows to set and change the camera parameters without the need to remove or move the camera.



SPECIFICATION

Standard:	PAL
Sensor:	1/3 " Sony Super HAD II CCD
Resolution:	650 TVL
Lens:	2.8 ... 12 mm (adjusted by a screw driver, inside the housing)
View angle:	81 ° ... 23 ° (manufacturer data) 85 ° ... 29 ° (our tests result)
Range of IR illumination:	20 m
S/N ratio:	> 52 dB
Video output:	1 Vpp / 75 Ω
Power supply:	12 V / 300 mA
Main features:	• D-WDR - Wide Dynamic Range • 2-DNR - Digital Noise Reduction • HLC - High Light Compensation (spot) • BLC - configurable Back Light Compensation • AGC Motion Detection - max. 4 configurable zones • Privacy zones - max. 8 • Day/night mode - manual/auto • Monitor type correction - LCD/CRT • Sharpness - sharper image outlines
Vandal-proof:	✓
Permissible relative humidity:	max. 95 %
"Index of Protection":	IP66
Housing:	Dome - Metal
Color:	White
Operation temp:	-10 °C ... 50 °C
Weight:	0.74 kg
Dimensions:	Ø 140 x 93 mm

Supported languages:	English, Chinese, French, Spanish, Japanese, German, Portuguese, Russian
Guarantee:	2 years

PRESENTATION


Camera view after remove the Dome cover:



Mounting side view:



In the kit:

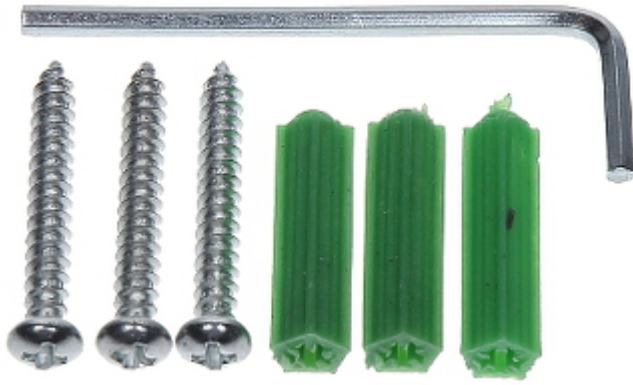

OUR TESTS


Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

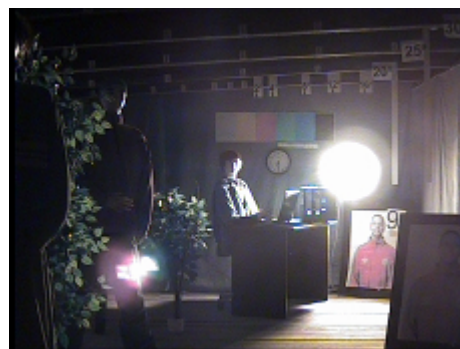

OUR OPINIONS

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



- OSD controller placed on the cable much simplified the camera configuration.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

