

Code: IP-5-11-E

SWITCH POE **IP-5-11-E** 5-PORT ATTE

Net: **126.20 EUR** Gross: **126.20 EUR**

The IP-5-11-E set consists of the XPOE-6-11-OF switch module and the APS-90-480-OF switching power supply enclosed in the ABOX-E internal enclosure.

The LONG RANGE operation mode allows to increase the range of power and data transmission for ports LAN 1 ... LAN 4 to 280m while limiting the network bandwidth for these ports to 10Mbps.



SPECIFICATION

LAN ports:	<ul style="list-style-type: none">• 1 x RJ45 10/100 Base-T - Uplink• 5 x RJ45 10/100 Base-T + PoE (802.3af/at) / Passive PoE
Management:	—
LED diodes:	Power, LAN
Transmission speed:	10 / 100 Mbps : 1 Port LAN + 5 LAN & PoE ports
Maximal output power:	<ul style="list-style-type: none">• 40 W @ Passive PoE - 1 ... 4 ports,• 70 W @ Passive PoE - Port 5,• 30 W @ PoE (802.3af/at) - 1 ... 5 ports
Maximal total power:	96 W
Operation modes:	<ul style="list-style-type: none">• Normal : 100 m @ 10/100 Mb/s - 1 ... 5 ports• Long Range : 280 m @ 10 Mb/s - 1 ... 4 ports ; 100 m @ 10/100 Mb/s - Port 5• Port LAN 6 - Uplink
Main features:	<ul style="list-style-type: none">• Possible cascading device connection (power transmission between devices using Passive PoE via LAN 5 port)• The output PoE voltage is equal to the input voltage• The ability to independently turn on and off the PoE power for each of the LAN 1 ... LAN 5 ports• The modular design streamlines service tasks and enables quick and easy system expansion• The raster system of module assembly facilitates the expansion of the device by further modules
Power supply:	230 V AC - cable terminals
Weight:	1.4 kg
Dimensions:	255 x 205 x 95 mm
Manufacturer / Brand:	ATTE



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Guarantee:

3 years

PRESENTATION

Internal view of the housing:

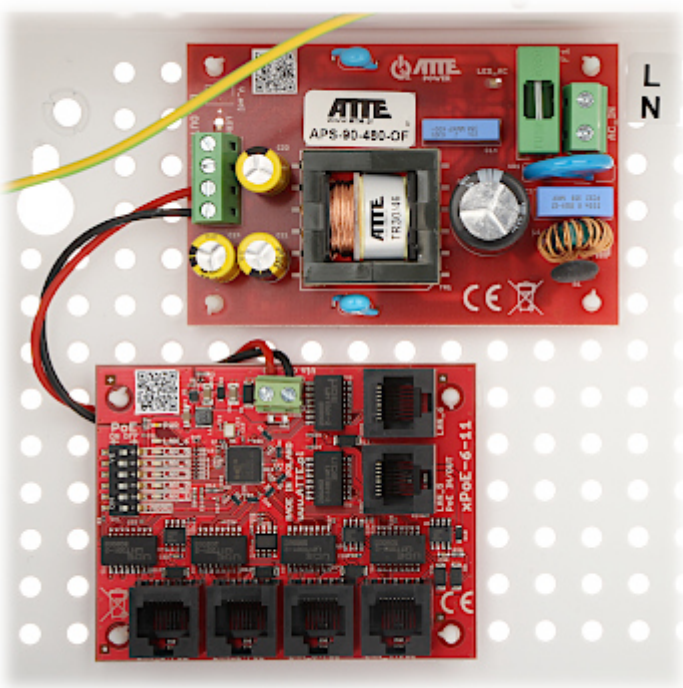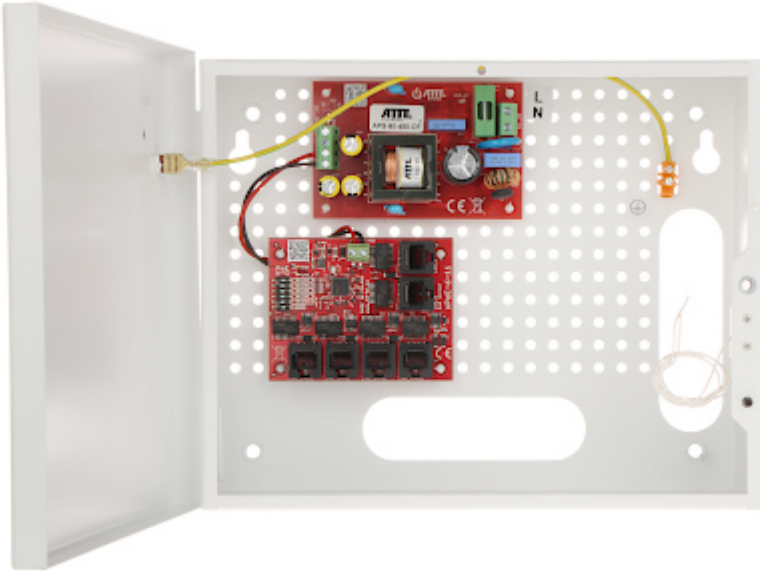

Mounting side view:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

