

Code: HDMI-EX-70IR-4KV2

## EXTENDER HDMI-EX-70IR-4KV2

Net: 114.06 EUR Gross: 114.06 EUR

Device allows to send High Definition signal to the TV-Set receiver equipped with HDMI connector via UTP Cat. 6/6A/7 cable.

HDMI-EX-70IR-4KV2 is perfect solution to connect the TV-SAT receiver, DVD player, computer or game-console to the TV-set/monitor for a long distance. To TV set you need connect only one UTP cable, what makes installation easy and improve aesthetic quality of installation.




### SPECIFICATION

Supported HDMI resolutions:	720p, 1080i, 1080p, 800 x 600, 1280 x 960, 1280 x 800, 1280x768, 1680x1050, 1360 x 768, 1366 x 768, 1600 x 900, 1024 x 768 3840 x 2160 - 4K UHD, max. 4096 x 2160
Maximal transmission range:	<ul style="list-style-type: none"><li>• 70 m @ UTP cat. 6 / 6A / 7 @ 4K UHD</li><li>• 50 m @ UTP cat. 5e @ 4K UHD</li></ul>
Supported audio formats:	LPCM, DTS-HD, DTS-Audio, Dolby Digital 5.1CH, Dolby Atmos
Supported HDMI standard:	2.0
HDCP:	2.2
Main features:	<ul style="list-style-type: none"><li>• IR receiver / IR transmitter - External</li><li>• Very good image quality with no visible distortions caused by compression</li><li>• No delays in video transmission</li><li>• Built-in HDMI signal splitter in the transmitter</li><li>• Built-in ESD protection</li><li>• EDID support</li><li>• HDR10 support</li></ul>
Power supply:	5 V DC / 2 A - Transmitter (power adapter included)
Power consumption:	8 W (total)
Operation temp:	-20 °C ... 60 °C
Permissible relative humidity:	0 % ... 90 % (non-condensing)
Weight:	0.14 kg
Dimensions:	85 x 75.5 x 16.5 mm - Transmitter or receiver dimensions
Guarantee:	2 years


### PRESENTATION

Transmitter and receiver connectors:


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

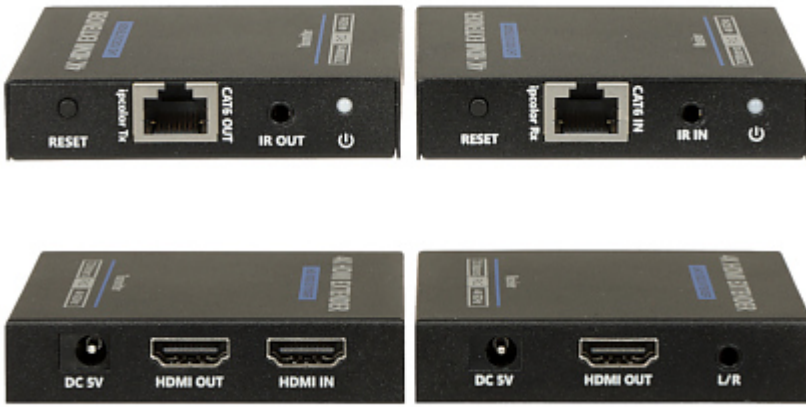

Connection schematic diagram:

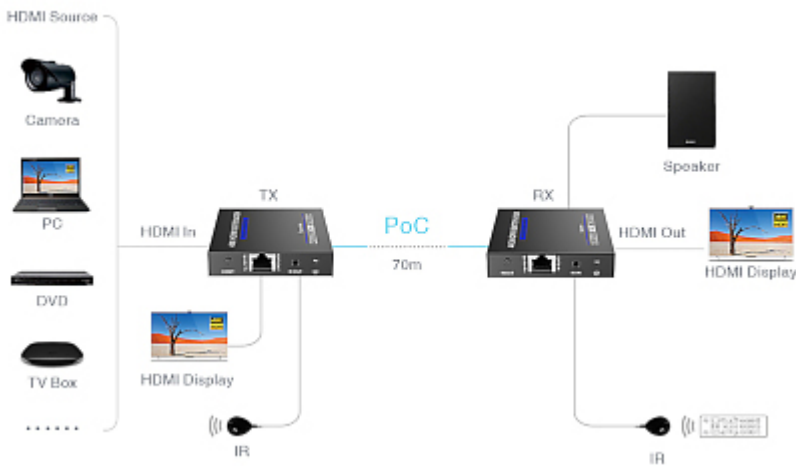

Only the transmitter requires power:

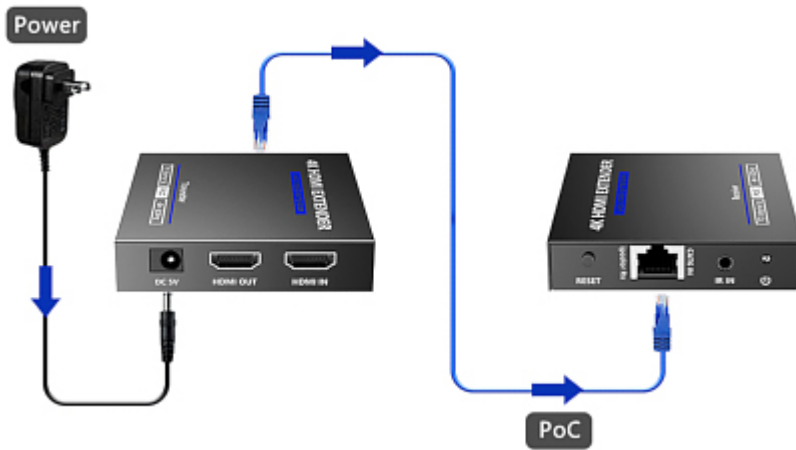

In the kit:



## OUR OPINIONS



- Very good image quality with no visible distortions caused by compression.
- No delays in signal transmission.

## PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

