

Code: APTI-33C6-2812P

IP CAMERA **APTI-33C6-2812P** - 3.1 Mpx 2.8 ... 12 mm

Net: **84.86 EUR** Gross: **104.38 EUR**

IP camera with efficient H.264/H.265/MJPEG image compression algorithm for clear and smooth video streaming at maximal resolution of 2048 x 1536 (3.0 MPx). Camera bracket allows to adjust the camera to any direction, and power cables are hidden inside the bracket. PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/2.8 " Sony CMOS IMX123
Digital Image Processor:	Hisilicon 3516D
Matrix size:	3.1 Mpx
Resolution:	2048 x 1536 - 3.1 Mpx , 1920 x 1080 - 1080p
Lens:	2.8 ... 12 mm, 5 Mpx
View angle:	<ul style="list-style-type: none">• 85 ° ... 23 ° (manufacturer data)• 87 ° ... 35 ° (our tests result)
S/N ratio:	> 50 dB
Range of IR illumination:	60 m
IR illuminator power adjustment:	Automatic
Audio:	External microphone input - CINCH
Image compression method:	H.265 / H.264 / MJPEG
Alarm inputs / outputs:	<input type="checkbox"/>
Bitrate:	64 ... 12000 kbps
Main stream frame rate:	max. 30 fps - 2048 x 1536
Network interface:	10/100 Base-T (RJ-45)
Network protocols:	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, SMTP
Default IP address:	192.168.1.168
Default admin user / password:	admin / admin
Web browser access ports:	80

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

PC client access ports:	80
WEB Server:	Built-in
Mobile client access ports:	80
Max. number of on-line users:	3
Port ONVIF:	80
ONVIF:	2.4
RTSP URL:	rtsp://user:password@ip_address:80/0 - Main stream rtsp://user:password@ip_address:80/1 - Sub stream
Mobile phones support:	Port no.: 80 or access by a cloud (P2P) • Android: Darmowa aplikacja FREEIP • iOS (iPhone): Darmowa aplikacja FREEIP
RS-485 interface:	<input type="checkbox"/>
Main features:	<ul style="list-style-type: none"> • WDR - Wide Dynamic Range • 3D-DNR - Digital Noise Reduction • Possibility to change the resolution, quality and bit rate • F-DNR (Defog) - Reduction of image noise caused by precipitation • ICR - Movable InfraRed filter • RESET button - on the cable • Mirror - Mirror image • Motion Detection • Privacy zones • Configurable: brightness, contrast, saturation • Sharpness - sharper image outlines
Power supply:	<ul style="list-style-type: none"> • PoE (802.3af), • 12 V DC / 730 mA
Power consumption:	≤ 9 W
Housing:	Compact, Metal
Color:	Graphite
"Index of Protection":	IP66
Supported languages:	English, Bulgarian, Chinese, French, Spanish, Dutch, Japanese, Korean, German, Polish, Portuguese, Russian, Turkish, Italian
Operation temp:	-20 °C ... 60 °C
Weight:	1.02 kg
Dimensions:	285 x 87 x 100 mm
Manufacturer / Brand:	APTI
Guarantee:	2 years

PRESENTATION



Side view:




Bottom view:



Camera connectors:



Bracket dimensions:

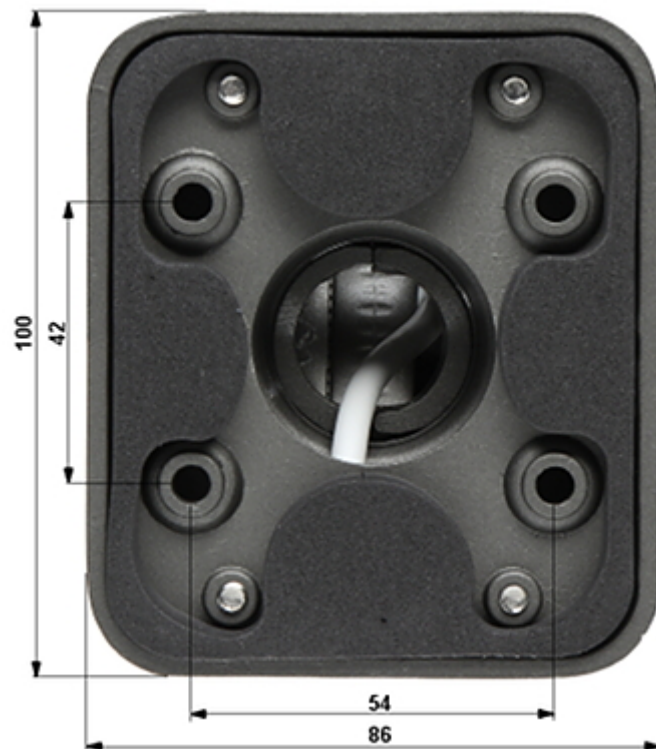

In the kit:



Configuration and operation of the FreeIP cloud:

:

OUR TESTS

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

