

Code: CD-2

## CURTAIN PIR DETECTOR **CD-2** SATEL

Net: **17.80 EUR** Gross: **21.89 EUR**



The curtain detector provides a narrow detection angle.


### SPECIFICATION

Application:	Indoor
Pyroelectric sensor:	Double
Sensor type:	Passive Infra Red (PIR)
Range:	5 x 1 m, 15 °
Sensitivity adjustment:	✓
Alarm outputs:	NC
Prealarm feature:	—
Alarm time:	2 s
Maximal outputs load:	40 mA / 24 V DC
Digital temperature compensation:	✓
Pet immunity:	—
Power supply:	12 V DC / 7 mA (max)
Operation temp:	-10 °C ... 55 °C
Target speed range:	0.3 ... 1 m/s


Main features:	<ul style="list-style-type: none"> <li>• Curtain lens</li> <li>• digital detection algorithm with temperature compensation for high immunity to false alarms and repeatability of parameters</li> <li>• Monitoring of motion detection system</li> <li>• Supply voltage control</li> <li>• Tamper detection - opening the enclosure, removing from mounting surface</li> <li>• LED indication</li> <li>• Compliance to EN 50130-4, EN 50130-5 standards</li> <li>• Environmental class EN 50130-5 : II</li> </ul>
Color:	White
Weight:	0.022 kg
Dimensions:	105 x 25 x 20 mm
Manufacturer / Brand:	SATEL
Guarantee:	2 years

## PRESENTATION

Internal view:

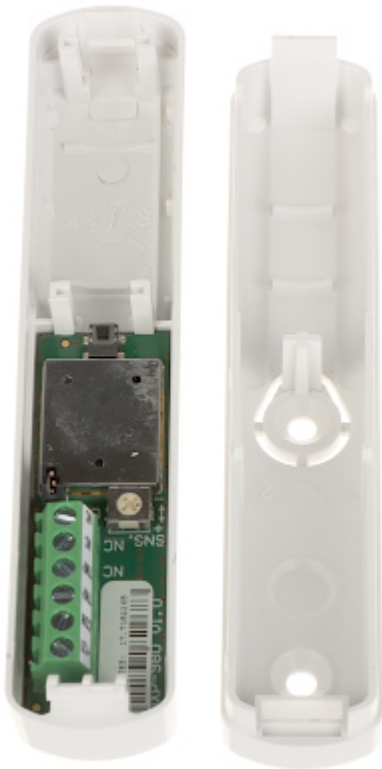



Description of particular elements of the device:

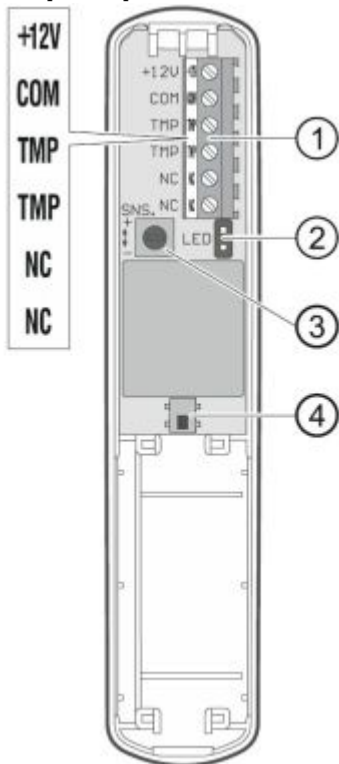

- 1. cable terminals
  - +12V Power supply
  - COM - Ground
  - TMP - TAMPER output
  - NC - Alarm output
  - 2. LED indication
  - 3. potentiometer for detection sensitivity adjustment
  - 4. tamper contact
- Mounting side view:



Detector range:

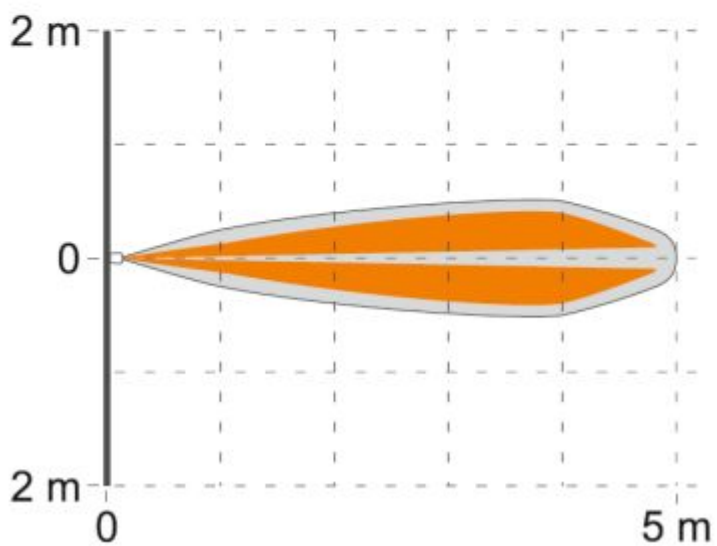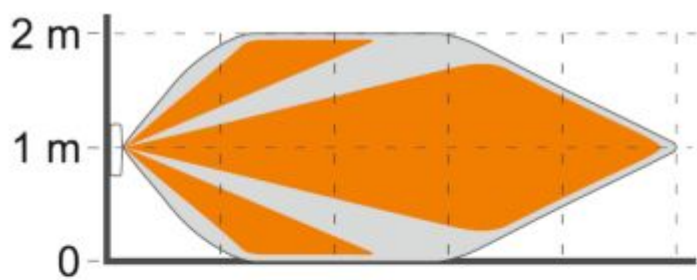

In the kit:

