

Code: OMEGA-51P22-6P

IP SPEED DOME CAMERA OUTDOOR **OMEGA-51P22-6P** - 5 Mpx 3.9 ... 85.5 mm

Net: **278.76 EUR** Gross: **342.87 EUR**



IP camera equipped with very good high resolution sensor. Due to above it is perfect solution for surveillance systems requiring persons or vehicles recognition.

The range of IR illumination according to the manufacturer data, depends on outer conditions (visibility - air transparency, environment, wall colors ie. scene reflectance).

For a few models of IP cameras working at $\geq 1920 \times 1080$ resolution we recommend to use of network with 1Gb/s bandwidth.

SPECIFICATION

Standard:	TCP/IP
Sensor:	1/2.5 " Progressive Scan Aptina CMOS
Matrix size:	5.1 Mpx
Resolution:	2560 x 1920 - 5 Mpx , 2560 x 1440 - 3.7 Mpx , 2304 x 1296 - 3 Mpx , 1920 x 1080 - 1080p 1280 x 720 - 720p
Scanning system:	Progressive
Lens:	3.9 ... 85.5 mm
View angle:	<ul style="list-style-type: none">• 73 ° ... 3.9 ° (manufacturer data)• 41 ° ... 3.5 ° (our tests result)
Optical zoom:	x 22
Auto IR illuminator:	Adaptive adjusting of the IR illuminator power to the lens zoom and outdoor light conditions
Range of IR illumination:	60 m
S/N ratio:	≥ 50 dB (AGC off)
Video output:	—
Rotation speed (manual control):	1 °/s ... 45 °/s (horizontal) 1 °/s ... 30 °/s (vertical)

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Horizontal rotation range:	360 ° continuous
Vertical rotation range:	0 ° ... 93 °
RS-485 interface:	—
Number of presets:	220
Horizontal scan:	✓
Image compression method:	H.265 / H.264
Protections:	Overvoltage
Alarm inputs / outputs:	—
Network interface:	10/100 Base-T (RJ-45)
Network protocols:	TCP/IP, HTTP, NTP, IGMP, DHCP, UDP, SMTP, RTP, RTSP, ARP, DDNS, DNS, PPPoE, P2P
Bitrate:	128 ... 12288 kbps
Main stream frame rate:	20 fps @ 5 Mpx
WEB Server:	Built-in
ONVIF:	2.4
Mobile phones support:	Port no.: 80 or access by a cloud (P2P) <ul style="list-style-type: none"> • Android: Free application BitVision • iOS (iPhone): Free application BitVision
Default IP address:	192.168.1.110
Default admin user / password:	admin / admin
Web browser access ports:	80
Port ONVIF:	8999
RTSP URL:	rtsp://ip_address/1/h264major - Main stream rtsp://ip_address/1/h264minor - Sub stream rtsp://ip_address:554/1/mjpeg - Sub stream
Route settings:	3
OSD menu:	preset 95
Main features:	<ul style="list-style-type: none"> • D-WDR - Wide Dynamic Range • Flicker Control - The technology eliminates the tiring eyes flickering image effect • Parking action - this function enables to locate the camera to specific position automatically if operator doesn't operate the controller for some time • ICR - Movable InfraRed filter • BLC - configurable Back Light Compensation • Auto White Balance • IR illuminator optimization • Mirror - Mirror image • Motion Detection - Split the screen into zones 22 x 18 • Privacy zones - max. 4
Power supply:	<ul style="list-style-type: none"> • PoE (802.3at), • 12 V DC / 3 A (power adapter included)
Power consumption:	≤ 15.4 W
Housing:	Speed Dome, Metal
Color:	White / Black
"Index of Protection":	IP66
Operation temp:	-20 °C ... 60 °C
Weight:	1.48 kg (with bracket)
Dimensions:	262 x 200 x 136 mm (with bracket)
Supported languages:	English



Guarantee:

2 years

PRESENTATION

Small dimensions camera:



Camera and bracket dimensions:



Camera connectors:




In the kit:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

OUR TESTS

Camera image at artificial illumination (about 30Lux):

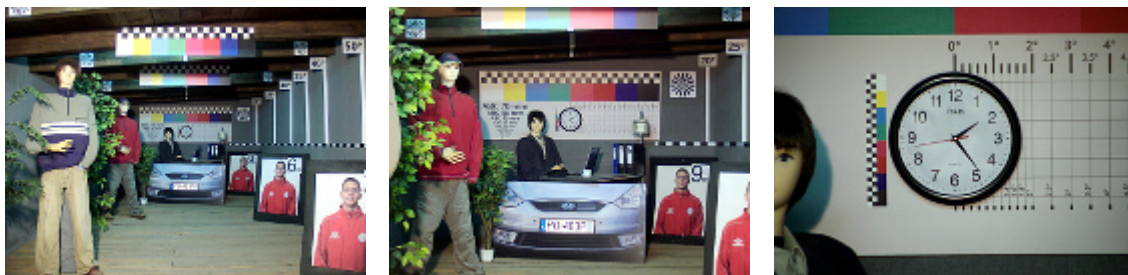

Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



OUR OPINIONS



- Very nice image at 5.0 MPx resolution.
- Very small camera dimensions.