

Code: PTZ85260-HNF-PA

# IP SPEED DOME CAMERA OUTDOOR **PTZ85260-HNF-PA** - 1080p, 5.6 ... 336 mm DAHUA

Net: **8 958.52 EUR** Gross: **8 958.52 EUR**



## Intelligent 3D Positioning System.

The biggest advantage of the camera is the lens with x60 optical zoom, which together with long range IR illuminator allow to 24 hours surveillance without any additional lighting even at area of several hundred meters. Due to above it is perfect solution for surveillance systems requiring persons or vehicles recognition. Thanks to the "Starlight" technology used, the camera only needs very low lighting to obtain a clear color image.

Built-in IR illuminator allows to operate at night conditions, and vari-focal lens with wide range of view angle adjustment enables optimal set the view field of camera to all conditions. The range of IR illumination according to the manufacturer data, depends on outer conditions (visibility - air transparency, environment, wall colors ie. scene reflectance).

In addition camera is equipped with lens wiper remote controlled via TCP/IP interface. For a few models of IP cameras working at  $\geq 1920 \times 1080$  resolution we recommend to use of network with 1Gb/s bandwidth.

## SPECIFICATION

Standard:	TCP/IP
Sensor:	1/1.8 " Progressive Scan CMOS
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 - 1080p , 1280 x 960 - 1.3 Mpx , 1280 x 720 - 720p
Scanning system:	Progressive
Lens:	5.6 ... 336 mm
View angle:	56.4 ° ... 1.2 ° (manufacturer data)
Optical zoom:	x 60
Digital zoom:	x 16
Range of IR illumination:	400 m
Video output:	1 Vpp / 75 Ω
Preset rotation speed:	• 160 °/s (horizontal) • 60 °/s (vertical)
Rotation speed (manual control):	• 0.1 °/s ... 160 °/s (horizontal) • 0.1 °/s ... 60 °/s (vertical)
Horizontal rotation range:	360 ° continuous

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60


Vertical rotation range:	-90 ° ... 45 °
RS-485 interface:	✓
Protocols:	Pelco-D, Pelco-P, DH-SD Auto detection
Number of presets:	300
Horizontal scan:	✓
Route settings:	8
Image compression method:	H.265 / H.264H / H.264B / H.264 / MJPEG
Alarm inputs / outputs:	7 / 2
Audio:	<ul style="list-style-type: none"> <li>• 1 Audio input</li> <li>• 1 Audio output</li> <li>• Bi-directional audio streaming support</li> </ul>
Main stream frame rate:	1 ... 25 fps - 1080p
Network interface:	10/100 Base-T (RJ-45)
Network protocols:	IPv4/IPv6, HTTP, HTTPS, IEEE 802.1x, QoS, FTP, SMTP, UPnP, SNMPv1/v2c/v3(MIB-2), DNS, DDNS, NTP, RTSP, RTP, TCP/IP, UDP, IGMP, ICMP, DHCP, PPPoE
WEB Server:	Built-in, NVR compliance
Max. number of on-line users:	20
ONVIF:	✓
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) <ul style="list-style-type: none"> <li>• Android: Free application <a href="#">DMSS</a></li> <li>• iOS (iPhone): Free application <a href="#">DMSS</a></li> </ul>
Default IP address:	192.168.1.108
Default admin user / password:	admin / -
Web browser access ports:	80, 37777
PC client access ports:	37777
Mobile client access ports:	37777
Port ONVIF:	80
RTSP URL:	rtsp://admin:hasło@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:hasło@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream
Memory card slot:	Micro SD memory cards up to 256GB support (possible local recording)
Main features:	<ul style="list-style-type: none"> <li>• WDR - 120 dB - Wide Dynamic Range</li> <li>• 2D-DNR, 3D-DNR - Digital Noise Reduction</li> <li>• F-DNR (Defog) - Reduction of image noise caused by precipitation</li> <li>• BLC/HLC - Back Light / High Light Compensation</li> <li>• EIS - Electronic Image Stabilization</li> <li>• ROI - improve the quality of selected parts of image</li> <li>• Day/Night mode (color/b&amp;w/auto)</li> <li>• ICR - Movable InfraRed filter</li> <li>• WB - White Balance (ATW/AWB/manual/indoor/outdoor)</li> <li>• Motion Detection</li> <li>• Configurable Privacy Zones - 24</li> <li>• AGC - Automatic Gain Control</li> <li>• Sharpness - sharper image outlines</li> <li>• Lens wiper remotely controlled via TCP/IP</li> <li>• IVS analysis : Intelligent Object Tracking, crossing the line (tripwire), intrusion, abandoned/missing object, scene changing, Face recognition, metadata support, classification of people and vehicles, Filtering of false alarms based on the recognition of persons and vehicles (tripwire, intrusion)</li> </ul>
Power supply:	36 V DC / 2.23 A (power adapter included)



Power consumption:	<ul style="list-style-type: none"> <li>• 28.7 W</li> <li>• 61.6 W ( LED IR, PTZ, Wiper )</li> </ul>
Housing:	Metal
Color:	Gray + Black
"Index of Protection":	IP67
Operation temp:	-40 °C ... 70 °C
Weight:	14.9 kg (with bracket)
Dimensions:	211 x 400 x 517 mm (with bracket)
Supported languages:	English
Manufacturer / Brand:	DAHUA
Guarantee:	<b>5 years</b>

## PRESENTATION

Camera and bracket dimensions:

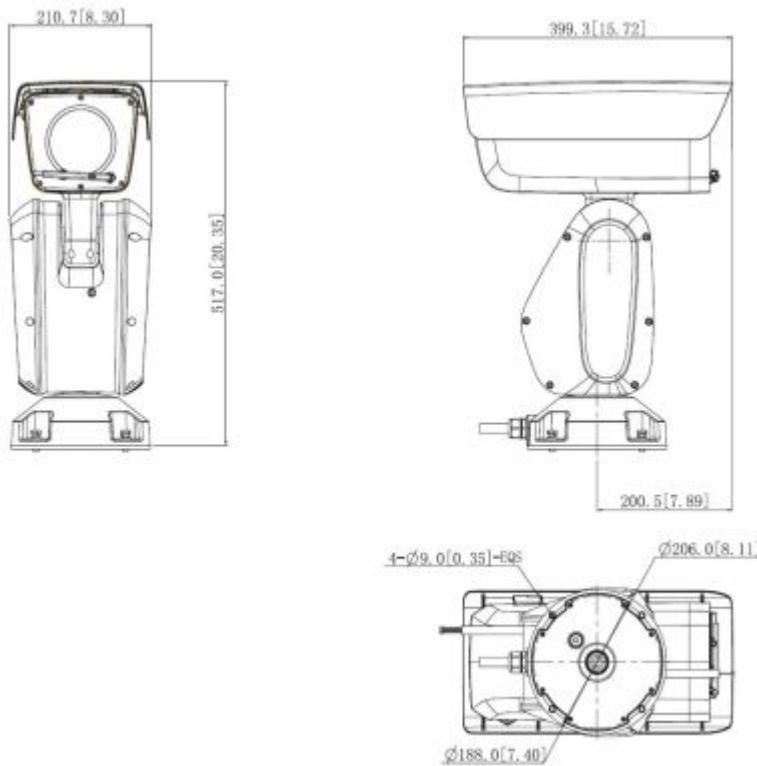

See how to initialize DAHUA cameras:

:

## OUR OPINIONS



- Thanks to the "Starlight" technology used, the camera only needs very low lighting to obtain a clear color image.

## PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------