

Code: ATE-CAM-AHD238HD

AHD MOBILE CAMERA **ATE-CAM-AHD238HD** - 1080p 2.8 mm AUTONE

Net: **39.65 EUR** Gross: **48.77 EUR**

The ATE-CAM-AHD238HD camera is designed for installation outside vehicles.

The AHD interface allows to transmission of analog, composite video signal via coaxial cable. During transmission there are no delays and is maintained the original, high quality image.

Camera is according to IP65 Index of Protection norm.



SPECIFICATION

Standard:	AHD
Sensor:	1/3 " Sony CMOS IMX323
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 - 1080p
Lens:	2.8 mm
View angle:	89 °
Range of IR illumination:	10 m
S/N ratio:	≥ 58 dB
Video output:	1 Vpp / 75 Ω - M12, 4-pin socket, Code A
Audio:	—
Main features:	<ul style="list-style-type: none">• AGC - Automatic Gain Control• BLC - Back Light Compensation• Auto White Balance• ICR filter - IR illuminators support• Sharpness - sharper image outlines
OSD menu:	—
Housing:	Dome, Metal
Color:	White
Application:	The camera is designed for installation outside vehicles

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Power supply:	12 V DC / 420 mA - Powering the cameras with 12V DC voltage directly from recorder
Power consumption:	< 5 W
Operation temp:	-10 °C ... 60 °C
Weight:	0.14 kg
Dimensions:	Ø 60 x 59 mm
Manufacturer / Brand:	AUTONE
Guarantee:	2 years

PRESENTATION

Small dimensions camera:




Camera is out from clamping ring:



Mounting side view:



In the kit:

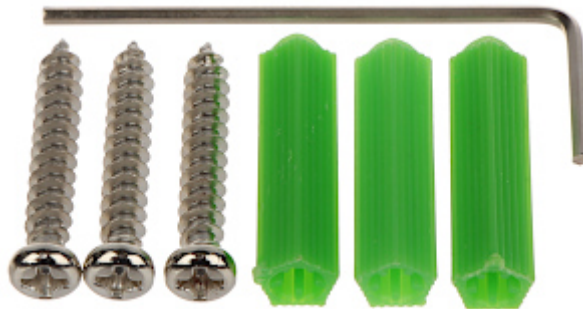

OUR TESTS

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



OUR OPINIONS



- Very small camera dimensions.
- Solid workmanship.