

Code: VI-750/R1U

## UPS VI-750/R1U 750 VA PowerWalker

Net: 310.53 EUR Gross: 381.95 EUR

The VI-750/R1U UPS is a professional device used to maintain the operation of the components connected to it. The device is mounted to RACK 19" cabinet.



### SPECIFICATION

Nominal power:	450 W
Apparent Power:	750 VA
Input voltage:	165 ... 290 V AC
Input frequency:	45 ... 55 Hz
Output voltage:	230 V AC (Pure Sine Wave)
Output frequency:	50 Hz
Voltage adjustment:	± 10 %
Frequency adjustment:	—
Transfer time:	max. 4 ms
Charging time (recover to 90% capacity):	8 hours
Battery:	2 x 6V/9Ah
Estimated battery operation time:	<ul style="list-style-type: none"><li>• 0.4 minutes @ 100% load</li><li>• 8.7 minutes @ 50% load</li></ul>
Number of outputs:	4 pcs IEC320 C13 socket
Management software:	<a href="#">PowerMaster</a>
Protections:	<ul style="list-style-type: none"><li>• Glass Fuse</li><li>• Overvoltage</li><li>• Overload protection</li><li>• EPO (Emergency power off) switch</li></ul>
Operation state indication:	<ul style="list-style-type: none"><li>• LCD display: operation mode, battery charging level, in/out voltage level</li><li>• Sound signaling - with Mute function</li></ul>
Main features:	<ul style="list-style-type: none"><li>• "Cold Start" function</li><li>• Expansion slot</li><li>• Battery charge and maintenance control</li><li>• USB/RS-232 communication port</li></ul>
Application:	<ul style="list-style-type: none"><li>• Surveillance Systems</li><li>• data storage centers</li><li>• network, servers, workstations</li><li>• Industrial Equipment</li></ul>
Housing type:	RACK
Operation temp. / Relative humidity:	0 °C ... 40 °C / 0 ... 90 % (non-condensing)
Weight:	8.81 kg

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

Dimensions:	435 x 235 x 44 mm ; RACK 19", 1U
Manufacturer / Brand:	PowerWalker
Guarantee:	2 years

**PRESENTATION**


Front view:



Rear view:



Expansion slot:

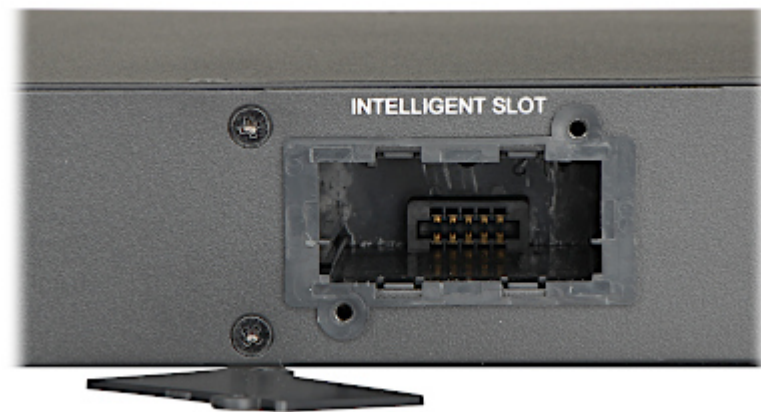

In the kit:



**PACKAGE**

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

