

Code: DS-1H34-0102P

EXTENDER **DS-1H34-0102P** Hikvision

Net: **40.89 EUR** Gross: **40.89 EUR**



The DS-1H34-0102P allows to increase the distance of PoE power sending and data transmission via UTP Cat.5e up to 200 m (EXTEND mode disabled) or up to 400 m (EXTEND mode enabled). The device does not require external power supply.

WARNING! With the EXTEND mode enabled, the maximum camera power should not exceed 5 W.

SPECIFICATION

Standards:	PoE : IEEE 802.3at, IEEE 802.3af
Input voltage:	42 ... 57 V DC
Output voltage:	42 ... 57 V DC
Number of inputs:	1
Number of outputs:	2
Connector:	3 x RJ-45 socket
LED indicators:	Link/Act
Supported data rates:	Range : <ul style="list-style-type: none">• 100 m - Input + 2 x 100 m - Output @ 10 / 100 Mbps, The EXTEND mode disabled• 200 m - Input + 2 x 200 m - Output @ 10 Mbps, The EXTEND mode enabled
Output power:	according to IEEE 802.3af - The power should be reduced by 2 W, which the device consumes
Protections:	<ul style="list-style-type: none">• Overvoltage protection• Short-circuit protection
Housing:	Metal
Operation temp. / Relative humidity:	-30 ... 70 °C / 10 ... 90 %
Weight:	0.20 kg
Dimensions:	94 x 72 x 26 mm
Manufacturer / Brand:	Hikvision
SAP Code:	301800920
Guarantee:	3 years

PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Top view:




Connectors:



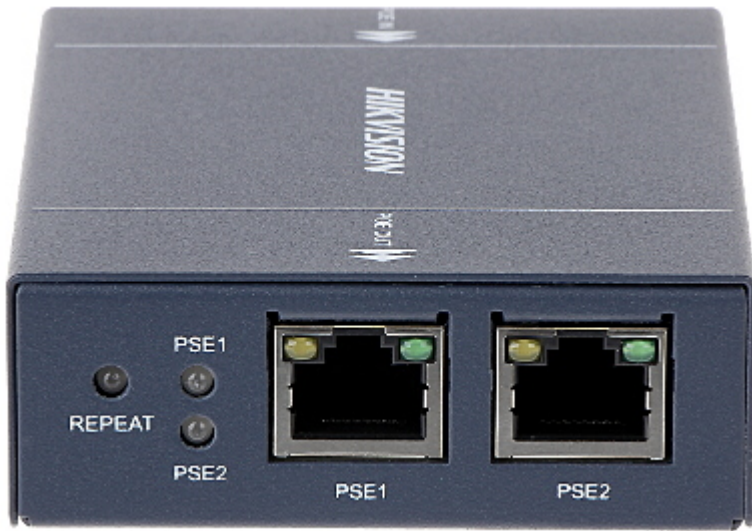


Transmission schematic diagram:

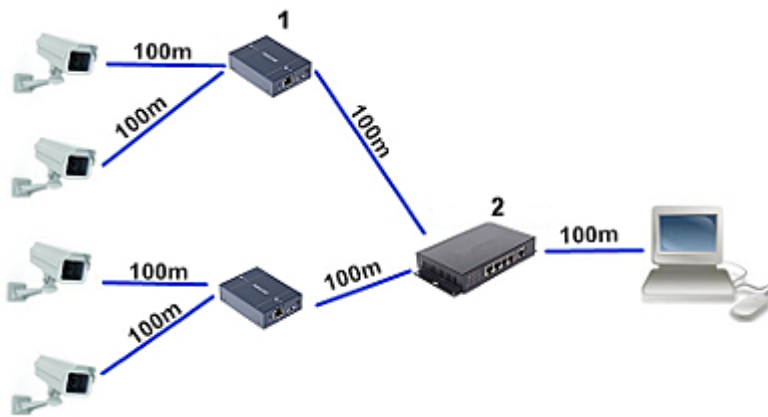

1. DS-1H34-0102P

2. Switch PoE

In the kit:

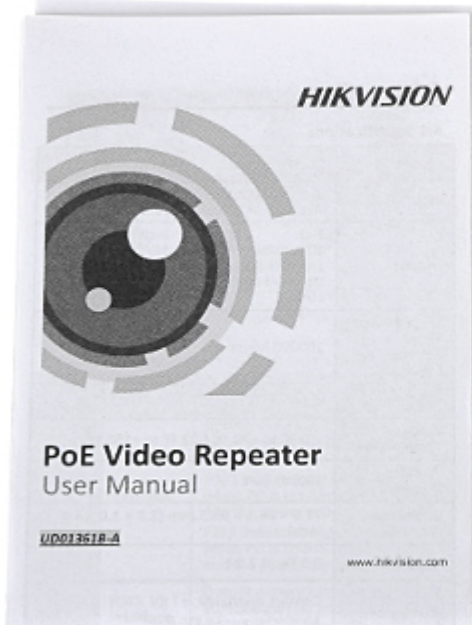

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60