

Code: NS100-TRISHIELD

COAXIAL CABLE NS100-TRISHIELD

Net: 0.29 EUR Gross: 0.29 EUR

The cable complies with the CPR No. 305/2011 directive and meets the requirements of the PN-EN 50575 European standard which specifies requirements in fire conditions, test methods and rating of cables used as building material. The cable has a Declaration of Performance and a CE marking, which confirm its compliance with the guidelines of the CPR regulation.




SPECIFICATION

| In section: | 100 m . Price for 1m when buying a whole roll |
|------------------------------------|---|
| Inner conductor: | Ø 1.00 mm Cu Wire |
| Dielectric: | Ø 4.8 mm (physical foam) |
| Shield: | Double Al/PET |
| Braid: | 96 x 0.12 mm Al wire |
| Outer coating: | Ø 6.8 mm PVC |
| Coating color: | White |
| Impedance: | 75 Ω |
| Cable attenuation at 100m section: | 9 dB @ 200 MHz 17.5 dB @ 800 MHz 29 dB @ 1750 MHz 34.5 dB @ 2200 MHz |
| Guarantee: | 2 years |

PRESENTATION

Specification:

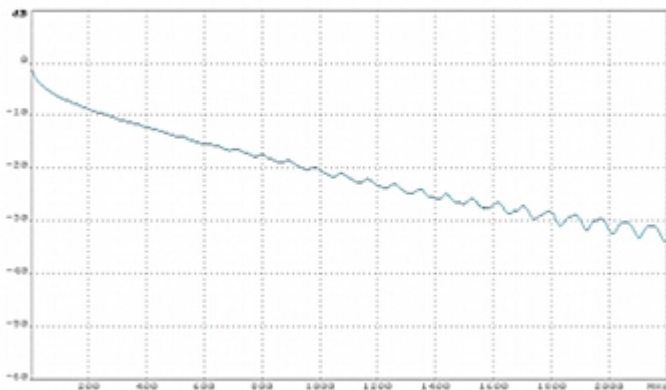

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



PACKAGE

| | |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60