

Code: DS-K1102E

PROXIMITY READER **DS-K1102E** Hikvision

Net: **55.27 EUR** Gross: **55.27 EUR**

Outdoor proximity cards and key-fobs reader.



SPECIFICATION

Cards support:	Unique EM 125kHz
Reading distance of prox-keys:	max. 5 cm
Autonomous operation:	—
Keyboard built-in:	—
Doorbell button:	—
Communication:	RS-485, Wiegand 34/26
Tamper output:	✓
Power supply:	12 V DC
Maximal current consumption:	500 mA
Main features:	• Watchdog built-in • LED indication • Buzzer • Installation in dedicated flush-mounted boxes DS-KAB86, DS-KAB118 • Device address switch
Operation temp:	-20 °C ... 65 °C
Permissible relative humidity:	10 ... 90 % (non-condensing)
"Index of Protection":	IP65
Housing:	Plastic, Waterproof
Color:	Black
Weight:	0.22 kg

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Dimensions:	121 x 87 x 14 mm
Manufacturer / Brand:	Hikvision
SAP Code:	302900915
Guarantee:	3 years


PRESENTATION

Front panel view:




Mounting side view:




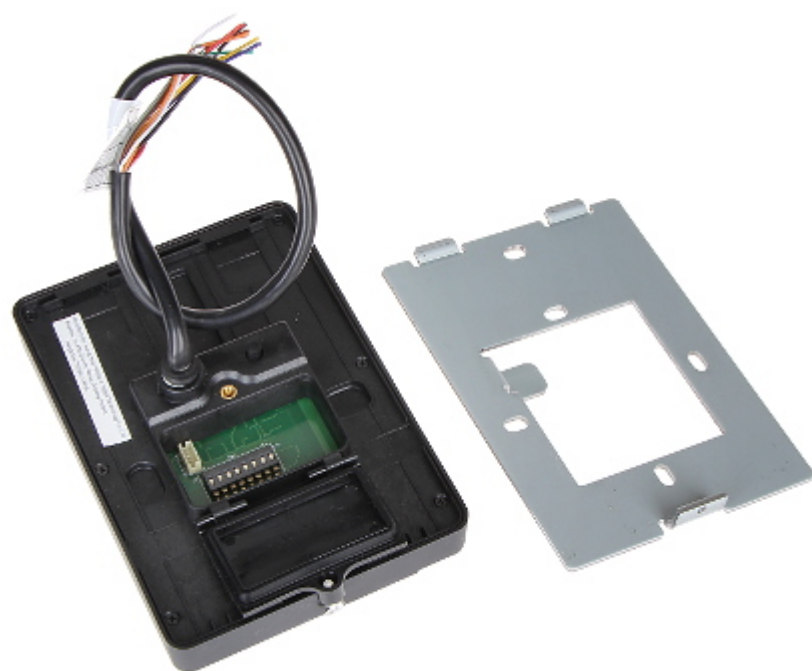

On the body, under the cover there are placed configuration switches:

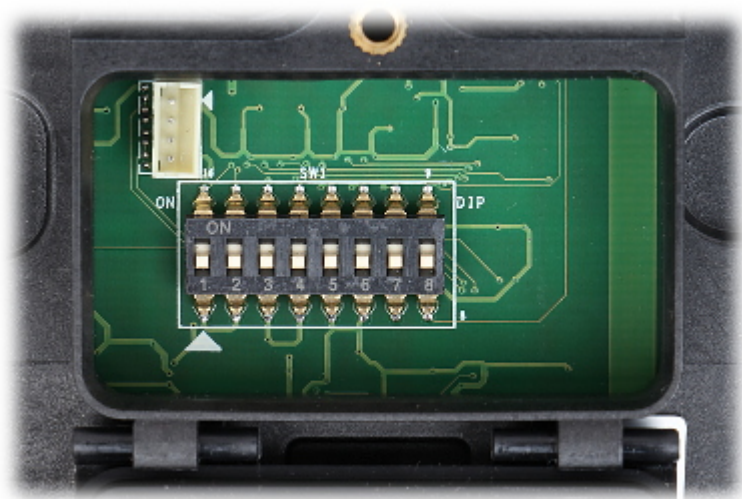

Connectors:

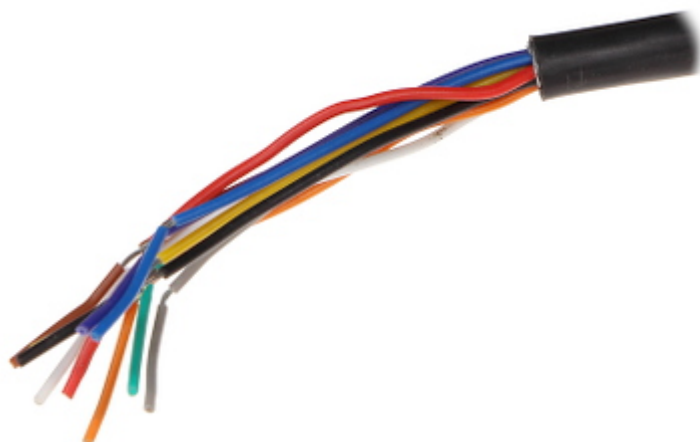

Connectors description:

WIRE COLOR	SIGNAL
ORANGE	ERR
WHITE	W1
GREEN	W0
BLUE	485B
YELLOW	485A
RED	12V
BLACK	GND
GREY	TAMPER
PURPLE	BEEP
BROWN	OK

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------