

Code: ARU-200

RADIO SIGNALS RETRANSMITTER **ARU-200** SATEL

Net: **99.59 EUR** Gross: **122.50 EUR**

The ARU-200 module is used to receive transmissions from ABAX 2 wireless devices and then retransmit them. ARU-200 also allows to increase the radio communication range of the ABAX 2 system.

The device is equipped with buffered power adapter and built-in backup battery of 1.8Ah capacity.




SPECIFICATION

Support:	Satel ABAX 2
Number of supported wireless devices:	max. 46
Frequency band:	868 ... 868.6 MHz
Radio communication range (at open area):	<ul style="list-style-type: none">• 2000 m @ ACU-220,• 1600 m @ ACU-280
Main features:	<ul style="list-style-type: none">• Operation status LED indicator,• Microswitch as tamper contact,• AES encrypted two-way radio communication in the 868 MHz frequency band,• Automatic selection of one of the 4 transmission channels, allowing transmission without interference with other signals,• Built-in advanced power adapter with extended diagnostics,• Li-Ion battery 3.7 V / 1800 mAh
Power supply:	230 V AC
Current consumption:	<ul style="list-style-type: none">• 8 mA• max. 15 mA
Environmental class EN 50130-5:	II
Operation temp:	-10 °C ... 55 °C
Weight:	0.27 kg
Dimensions:	126 x 158 x 32 mm
Manufacturer / Brand:	SATEL
Guarantee:	2 years

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

PRESENTATION

Internal view of the housing:

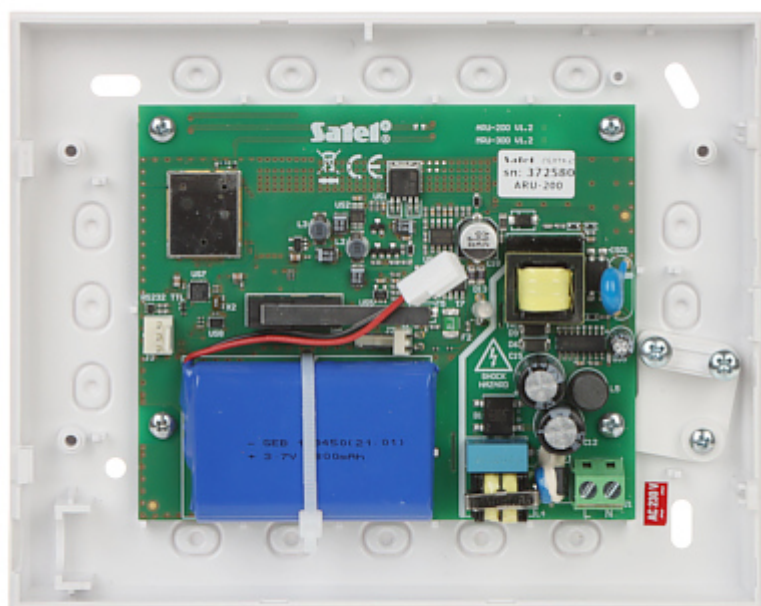

Mounting side view:

