


Code: PK1-12-PDT

## CONFIGURABLE CHANGE-OVER RELAY MODULE **PK1-12-PDT**

Net: **29.30 PLN** Gross: **36.04 PLN**

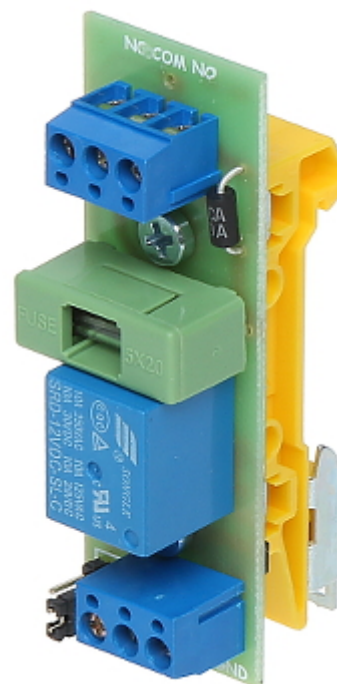

The PK1-12-PDT module consists of a change-over relay and the configuration system setting out control of the relay with high or low state. It can be used to increase maximal load of controller transistor output line and for galvanic isolation between output line and load point.


### SPECIFICATION

Number of relay outputs:	1
Power supply:	10 ... 16 V DC
Current consumption:	35 mA / 12 V DC
Relay maximal load:	10 A (max), 30 V DC / 50 V AC (max)
Relay switching voltage H:	> 4 V
Relay switching voltage L:	< 2.7 V
Output:	NO/NC
Application:	relay for electromagnetic lock/electric strike
Main features:	<ul style="list-style-type: none"><li>• DIN, TS-35 rail mounting,</li><li>• LED indication,</li><li>• Protections : Overvoltage, Reverse polarity connection, 5/20mm delayed fuse 10 A</li></ul>
Operation temp:	-10 °C ... 40 °C
Weight:	0.04 kg
Dimensions:	78 x 27 x 41 mm
Manufacturer / Brand:	DELTA
Guarantee:	<b>3 years</b>


### PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60


Top view:

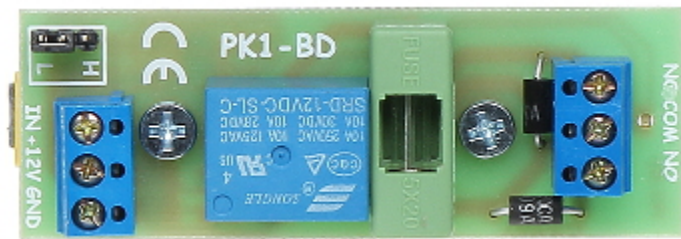

Connectors:

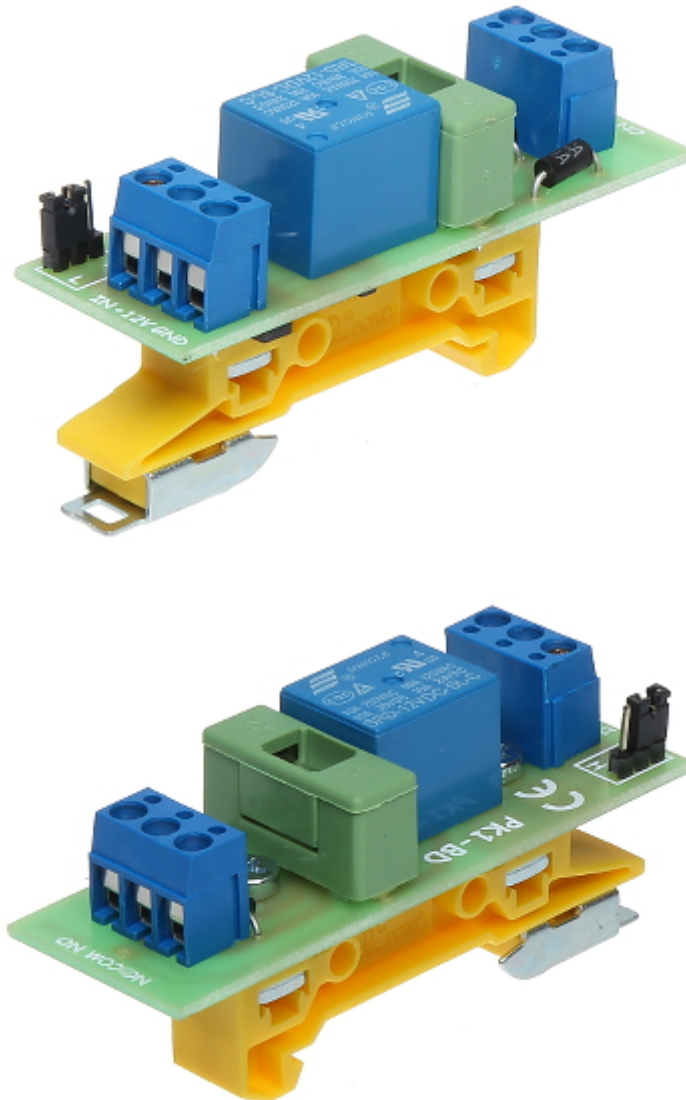

Mounting side view:

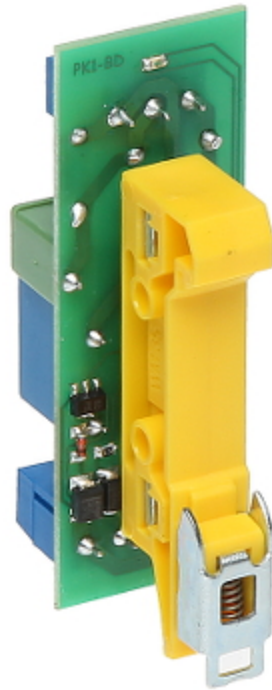

Schematic diagram:

