


Code: LZ-8/POL

## POWER SUPPLY DISTRIBUTOR LZ-8/POL

Net: 6.66 EUR Gross: 8.19 EUR

The LZ-8/POL is a passive device and allows to distribute the power supply.

An unquestionable advantage of employing the LZ-8/POL in monitoring systems powered from a central point is additional tamper protection. Without individual protection for each power line, an intruder can stop powering of the whole system just by shorting out the power line of the single camera.

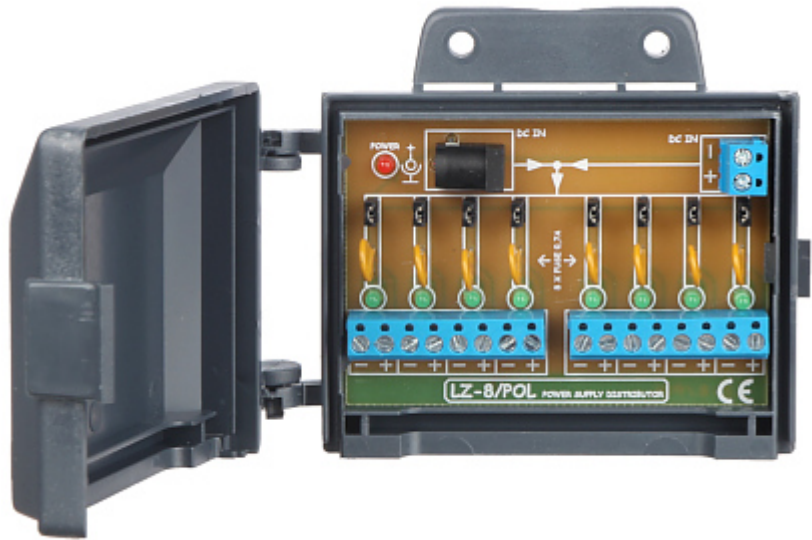


### SPECIFICATION

Number of power inputs:	2
Number of power outputs:	8
Maximal power voltage:	0 ... 24 V DC (typical 12V)
Maximal power supply current:	<ul style="list-style-type: none"><li>• 5.6 A terminals</li><li>• 4 A 5.5/2.1 socket</li></ul>
Protection type:	8 x 0.7 A Polymer fuse
Power connectors type:	Input : socket 2.1/5.5 mm / Cable terminals Output : Cable terminals
Operation temp:	-40 °C ... 45 °C
Permissible relative humidity:	< 95 %
Dimensions:	116 x 46 x 25 mm
Weight:	0.08 kg
Manufacturer / Brand:	DELTA
Guarantee:	<b>3 years</b>

### PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

The LZ-8/POL board view:

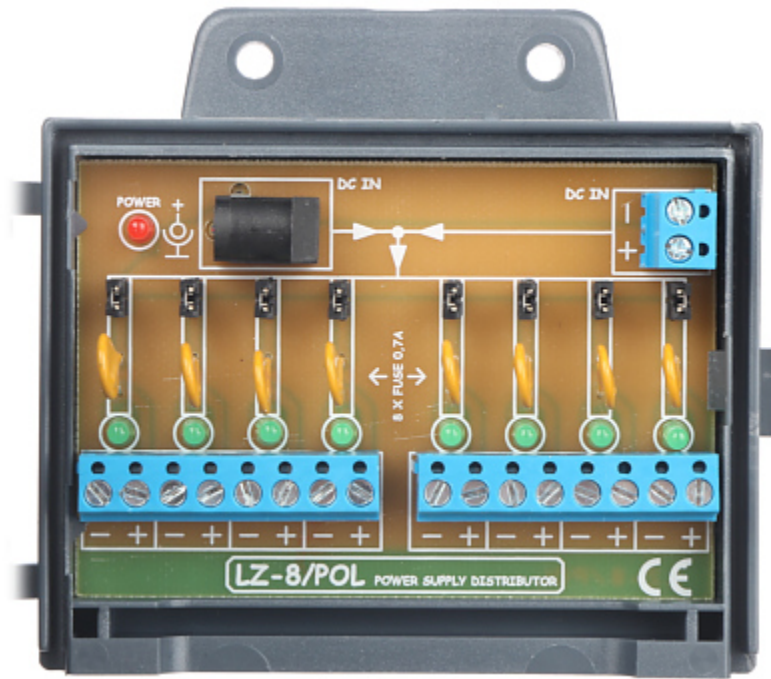

The housing construction enables easy mounting the device on a wall or mast, using tie for example:

