

Code: CD-45A2

CARBON MONOXIDE (CO) DETECTOR **CD-45A2** EURA

Net: **30.34 EUR** Gross: **30.34 EUR**



The CD-45A2 microprocessor-based digital gas detectors are characterized by reliability and low current consumption. A digital temperature compensation feature allows to operate within a wide temperature range.

Gas concentration above the threshold level triggers visual and audible alarm signals. Device should be mounted at a height of about 0.7 ... 1.8 m above the floor.


SPECIFICATION

Detection:	Carbon Monoxide (CO)
Alarm signaling:	<ul style="list-style-type: none">• Buzzer• Blinking LED
Gas concentration to trigger alarm:	<ul style="list-style-type: none">• 300 ppm for max. 3 mins• 100 ppm for 10 ... 40 minutes• 50 ppm for 60 ... 90 minutes• 30 ppm for >120 minutes
Battery power supply:	2 x battery LR6 (AA) (included) Current consumption 20 μ A (Standby mode) 25 mA (alarm)
Main features:	<ul style="list-style-type: none">• Alarm signaling > 30 ppm• LCD display• Alarm siren > 85 dB/m• Test mode• Silent mode• Low battery level alarm• Failure signaling• Detector lifetime : 7 years
Operation temp:	0 °C ... 40 °C
Weight:	0.19 kg
Dimensions:	126 x 83 x 50 mm
Manufacturer / Brand:	EURA
Guarantee:	5 years

PRESENTATION

Front panel:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

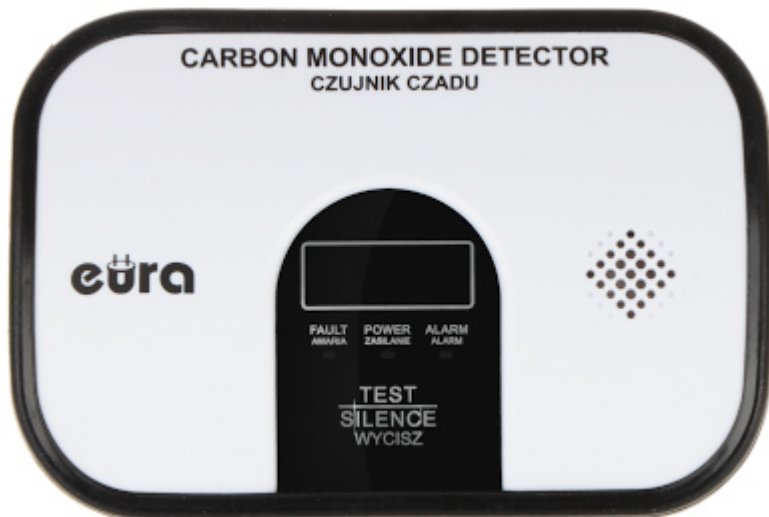

Rear view:



The device is secured with a silicone case, which also serves as a stand:



Place for batteries 2 x 1.5V AA:



In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

