

Code: PRT64MF-G

PROXIMITY READER WITH KEYPAD **PRT64MF-G** ROGER

Net: **78.96 EUR** Gross: **78.96 EUR**



Outdoor proximity cards and key-fobs reader. 13.56 MHz S50 standard.

SPECIFICATION

Cards support:	13.56 MHz S50
Reading distance of prox-keys:	max. 6 cm
Keyboard built-in:	✓
Autonomous operation:	✓
Doorbell button:	—
Tamper output:	✓
Communication:	<ul style="list-style-type: none">• Wiegand 26-66bit• Magstripe (Clock & Data)• RACS (Roger) and others
Main features:	<ul style="list-style-type: none">• Tamper protection (detection of removing from mounting surface and enclosure opening)• LED indication• Beep signal• Different options of PIN codes and keyboard codes transmission• Manual or computer programming• Can be used for 13.56 MHz S50 card programming (free of charge RARC software is required)• 120 indexed users• History of 1024 events• Programmable relay output 1.5A/30V• Two transistor outputs• Two inputs NO/NC
Power supply:	10 ... 15 V DC
Average current consumption:	85 mA

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Operation temp:	-25 °C ... 60 °C
Permissible relative humidity:	10 ... 95 % (non-condensing)
"Index of Protection":	IP67
Weight:	0.19 kg
Dimensions:	115 x 80 x 35 mm
Manufacturer / Brand:	ROGER
Guarantee:	3 years

PRESENTATION


Rear view:




Internal view of the housing:




Connectors description:

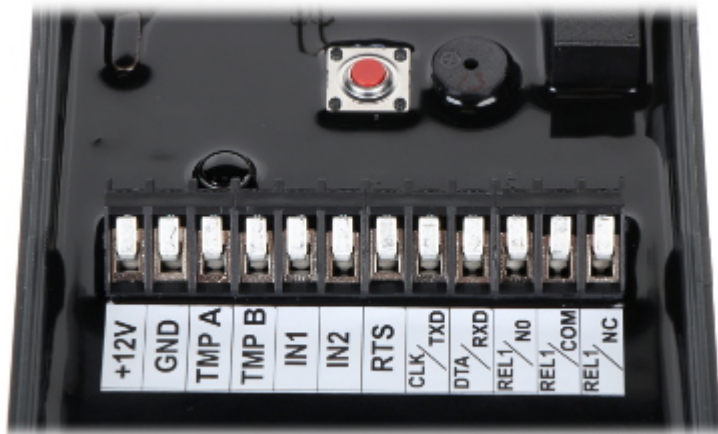

Dimensions:

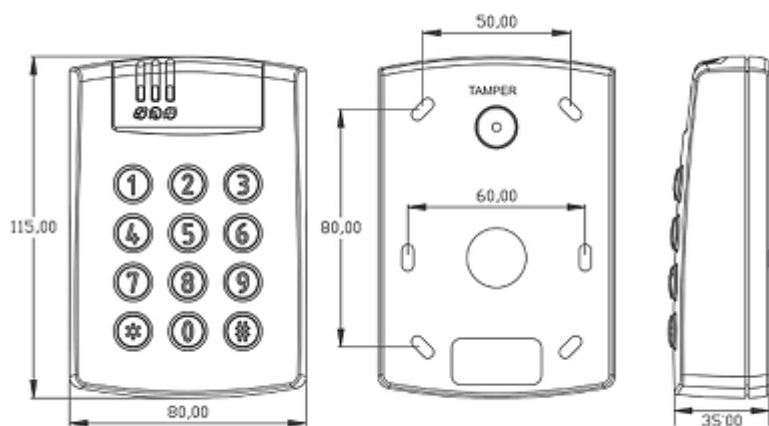

In the kit:

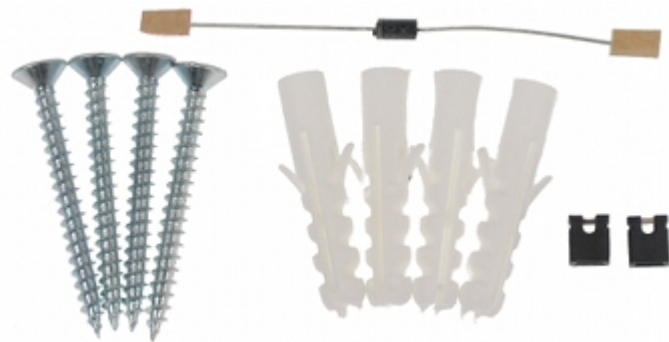

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------