

Code: DS-K1108AMK

PROXIMITY READER **DS-K1108AMK** Hikvision

Net: **85.66 EUR** Gross: **85.66 EUR**

Outdoor proximity cards and key-fobs reader.



SPECIFICATION

Cards support:	13.56 MHz S50
Reading distance of prox-keys:	max. 5 cm
Autonomous operation:	—
Keyboard built-in:	✓
Doorbell button:	—
Communication:	RS-485, Wiegand 34/26, Open Supervised Device Protocol (OSDP)
Tamper output:	✓
Power supply:	12 V DC
Maximal current consumption:	170 mA
Main features:	<ul style="list-style-type: none">• Watchdog built-in• LED indication• Buzzer• Device address switch
Operation temp:	-20 °C ... 65 °C
Permissible relative humidity:	10 ... 90 % (non-condensing)
"Index of Protection":	IP65
Housing:	Plastic
Color:	Black
Weight:	0.18 kg

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Dimensions:	123 x 88 x 21 mm
Manufacturer / Brand:	Hikvision
SAP Code:	302917287
Guarantee:	3 years

PRESENTATION

Front panel view:




Mounting side view:





View after removing the cover from the mounting side:

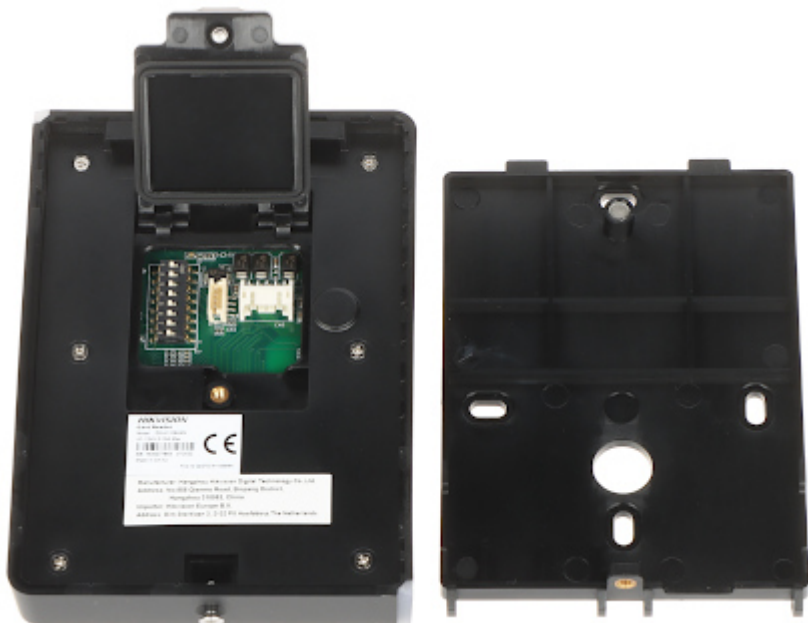

On the body, under the cover there are placed configuration switches:



HIKVISION
 Model: DS-2CE56A01-100
 IP: 100000-100000
 SN: H00217841 210021
 Made in China
 CE

Manufacturer: Hangzhou Hikvision Digital Technology Co., Ltd.
 Address: No. 888 Qianjin Road, Binjiang District,
 Hangzhou 310051, China
 Importer: Hikvision Europe B.V.
 Address: Dijk 200c/101, 2112 PK Hoofddorp, The Netherlands

Connectors description:

WIRE COLOR	SIGNAL
ORANGE	ERR
WHITE	W1
GREEN	W0
BLUE	485B
YELLOW	485A
RED	12V
BLACK	GND
GREY	TAMPER
PURPLE	BEEP
BROWN	OK

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

