


Code: TT-9/32-FT-PREMU

MULTISWITCH **TT-9/32-FT-PREMU** 9 INPUTS / 32 OUTPUTS PREMU TELMOR

PREMU TT-9/xx Multiswitches is a brand new generation of cascade and end multiswitches. Works perfectly in large-scale RTV/SAT installations and collective installations, where it is necessary to distribute RTV/SAT signal to multiple subscribers.

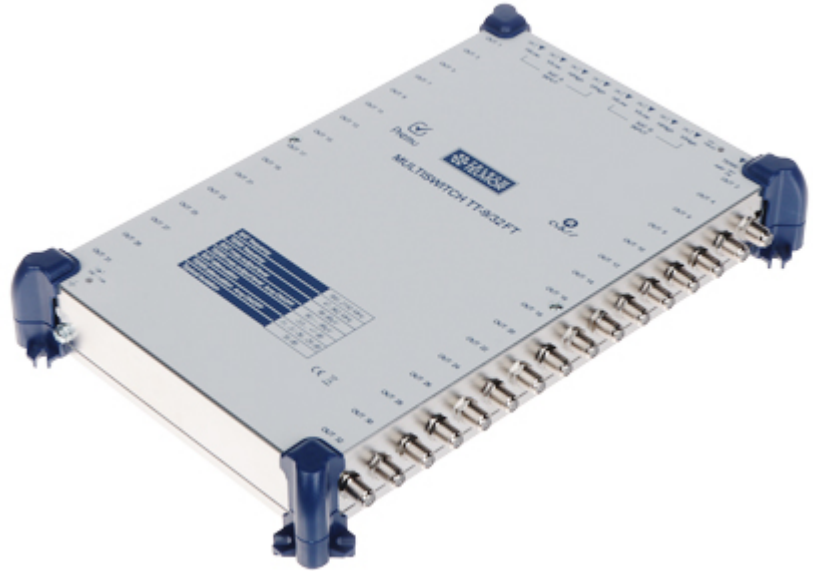

Inputs:	<ul style="list-style-type: none"> • 8x 950 MHz ... 2150 MHz, • 1x 47 MHz ... 862 MHz
Outputs:	32
Switching signals:	<ul style="list-style-type: none"> • 13 V / 18 V, • 0 Hz / 22 kHz, • DiSEqC 1.0
SAT Tap loss:	-3.5 ... +7 dB
TV Tap loss:	<ul style="list-style-type: none"> • Passive : -36 ... -29 dB • Active : -11 ... -3 dB
Return loss:	<ul style="list-style-type: none"> • TV input : 10 dB • SAT input : 10 dB
Maximal output level SAT:	98 dB μ V
Maximal output level TV:	<ul style="list-style-type: none"> • 87 dBμV @ 47 ... 170 MHz • 90 dBμV @ 170 ... 862 MHz
Isolation:	<ul style="list-style-type: none"> • Between inputs TV/SAT : \geq 30 dB • Between inputs SAT/TV : \geq 45 dB • Interpolarized H/V : 35 dB
Pre-amplifiers powering:	12 V DC / 150 mA
Power supply:	13 V DC / 1.5 A (power adapter included)
Dimensions:	215 x 330 x 51 mm
Weight:	1.165 kg
Manufacturer / Brand:	TELMOR



DATA SHEET

Guarantee:	2 years
------------	---------