


## DATA SHEET

## Code: INTEGRA-256-PLUS/EN ALARM CONTROL PANEL INTEGRA-256-PLUS/EN SATEL

Advanced alarm control unit providing alarm functions and optional implementation of home automation and access control systems.

Thanks to their full compliance with the EN50131 Grade 3 requirements, the INTEGRA Plus series control panels provide a perfect solution for implementing advanced security systems in facilities subject to considerable burglary risk, e.g. banks, jewelery shops or public utility buildings. A major advantage of the INTEGRA control units are their communication features combined with additional modules - GSM and TCP/IP.

System operation is possible with LCD keypads, partition keypads, keyfobs and proximity cards or remotely with PC or mobile phone. Flash firmware upgrade with a PC.

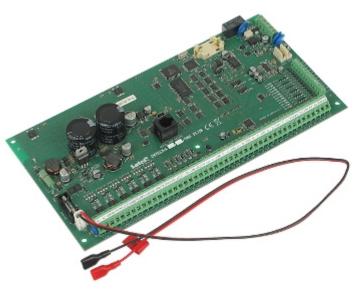

Mainboard inputs:	16 pcs
Mainboard outputs:	16 pcs
Maximal number of supported inputs:	256 pcs
Maximal number of supported outputs:	256 pcs
Current-carrying capacity, low-current programmable outputs:	50 mA
Current-carrying capacity, high-current programmable outputs (+/-10%):	3 A - 4 pcs
Maximal load:	3 A
Users + admins:	240 + 8
Partitions:	8
Zones:	32
Expansion modules:	max. 64
Events memory:	24575
Timers:	64
Supported keypads:	max. 8 pcs
Supporting the wireless ABAX system via bus:	¥
Keyboard included:	-
Enclosure included:	-
Protection class (Grade):	3



DELTA-OPTI Monika Matysiak; https://www.delta.poznan.pl POL; 60-713 Poznań; Graniczna 10 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



## DATA SHEET

Main features:	<ul> <li>Access control and home automation functions</li> <li>Built-in advanced power adapter with extended diagnostics</li> <li>Control panel programming and firmware upgrade via mini USB socket</li> </ul>
Power supply:	20 V AC / 337 mA
Operation temp:	-10 °C 55 °C
Permissible relative humidity:	93 %
Dimensions:	264 x 134 mm
Weight:	0.32 kg
Supported languages:	English
Manufacturer / Brand:	SATEL
Guarantee:	2 years

